



Kitchen goes way beyond
just preparing food

HOODS



Our goal is to create the best environment for you at home. Our hoods will preserve freshness, silence and harmony for your recipes in every corner of your kitchen saving money at the same time.

Feel the peace and quietness in your kitchen too. Feel the satisfaction of sharing amazing moments there, with the pleasure of an amazing design and the essence of your home. The hood is not just a noisy part of your kitchen, but something that keeps the atmosphere clean and fresh, creating harmony and a peaceful environment to cook or to share a piece of cake. Design is a priority with our hoods, that is why Teka creates exclusive and functional designs that goes along with the look of the rest of the appliances.



Find out what
innovation can
make you **feel**

Quadro

Feel the quiteness in your kitchen

Quadro hood shows an unique vertical design to impress even the most demanding chefs. The hood is made of black glass and anodized aluminium with high durability. The perfect combination also has a white display and an elegant LED lighting distributed all along the cooking area. Because your expectations deserves only the best.



EcoPower Motor

Silence, durability and consumption

EcoPower engines have both efficiency and productivity. Silent EcoPower model, A++ energy classification, bring us the chance to save money (75% compared with a D class), and we can also enjoy a quiet atmosphere with just 37dB anytime we use it.

Rim extraction


Keeps your kitchen fresh

A small slot is showed in the body of the hood and generates high pressure for a better and faster air extraction. Air can not go further than the cooking area thanks to the speed and efficiency of the hood. Cook free of odours and fumes.



New hoods made thinking of you and your future. Available in any kind of shape and size, eco-friendly but easy on your wallet, these hoods fits in your kitchen and in your life.



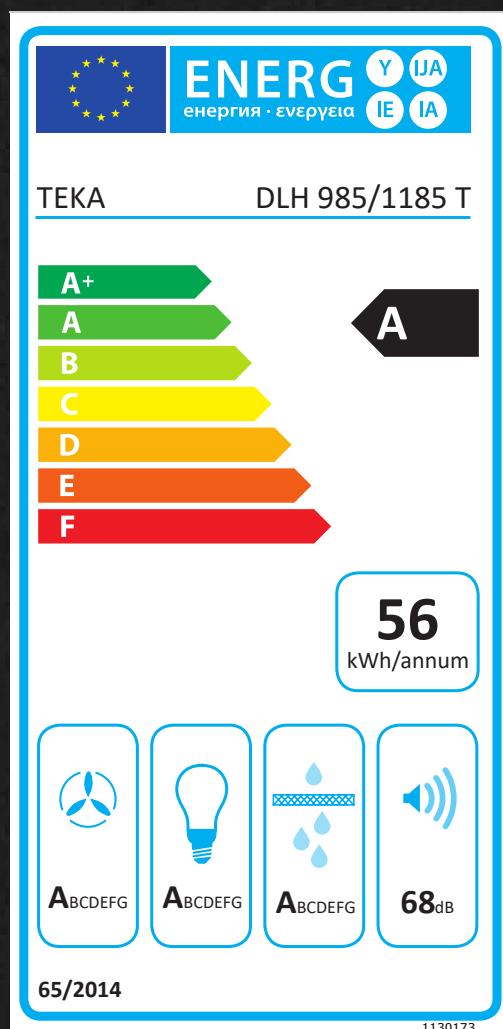

PERFECT-A4

The perfect balance between efficiency, design and productivity. An incomparable hood thanks to a full 4 A energy label: A class in energy efficiency, fluiddynamic, lightning and also in grease filtering. The hood can extract up to 800 m³ and remove 98% of the grease with its 12 layers filters. And from the hood to the dishwasher, because the stainless steel filters are designed to be washable, so forget about how to keep them clean.

A Energy efficiency

Energy efficiency index (EEI) It is calculated from annual consumption and from energy standard consumption.

A Fluid Dynamic Efficiency

Efficiency of the extraction system, affected by different variables like the shape of the hoods.

A Lighting efficiency class

Indicates the efficiency with which the hood is able to illuminate the cooker hob.

A Grease filtering efficiency class

Indicates the efficiency with which the hood filters grease generated through cooking process



What hood does my kitchen need?

Just calculate your kitchen's volume. For example 12m² with 2,5m height. That's how we get the total volume:
12m² x 2,5m = 30m³

Furniture has to be taken into consideration. Approx. 40%. Final total volume: 18m³ On the basis of the air is renovated 12 times per hour:
18m³ x 12 renovations = 216m³/h

In a 12m² kitchen we need a hood with 216m³/h for an effective extraction



LED light bar

Led light has a very positive effect for the environment. It is called the ecologic lighting due to the lack of mercury or any other hazardous substances that can contribute to the greenhouse effect and increase global warming. LED had other many advantages as low energy consumption, so we can save energy, or the fact that they don't need a warm-up period and they don't produce heat. But LED bar will perfectly light your cooking zone so you won't miss a single thing of your recipes.



All sizes and shapes for every taste and need

Round and rectangular shapes, with glass or steel finish and with infinite benefits. And everything with an emblematic design to create the environment you are looking for in your kitchen.

Hoods

Kitchen goes way beyond just preparing food.

| MAESTRO | | | | | | |
|------------|-----------------|---------------------|-----------------|----------------------|----------------|---------------|
| | 120 | 110 | 90 | 70/60 | 40 | |
| ISLAND | DHT 1285 ISLAND | DH2 ISLA 1285 | DPL 1185 ISLAND | DH2 985 ISLAND | DH2 980 ISLAND | CC 485 ISLAND |
| VERTICAL | | | QUADRO DLV 998 | DVT 985 | DVU 590 | DVT 785 |
| | | | DLV 985 | QUADRO DLV 980 | DLV 685 | DVT 685 |
| | | | DVF 97670 TBS | DU 985 | DVT 785 | DVF 67670 TBS |
| HORIZONTAL | DLH 1186 T | DLH 986 T | DPL 986 T | DLH 786 T | DLH 686 T | |
| | DPL 1185 | PERFECTA4 DLH 985 T | DQ2 985 | PERFECTA4 DLH 1185 T | | |
| PYRAMIDAL | | | | | | |

TOTAL**EASY**

90

70/60

90

70/60



DSB 985 ISLAND



DG3 985 ISLAND

DG3 ISLA 980
ISLAND

DSH 985



DPS 986



DPS 786



DSH 785



DSJ 950



DSJ 980



DSJ 680



DSJ 750



DSH 685



DVN 94030 TTC



DVN 74030 TTC



DVN 64030 TTC



DSS 985



DG 985



DG 785



NC 985



GFH 73



GFG 2



DG 650



GFT



XT2 8910



DSS 985



DOS 90.1 AT



DOS 90.1 VN



DSS 785



DM 775



DBB 90



DBB 70



DBP 70 PRO



DM 975



DOS 60.1 AT



DM 675



DBP 90 PRO



DBP 60 PRO



DBB 60



DMR 975



DOS 60.1 VN



DBB 90 HP



DBB 60 HP

Hoods

Kitchen goes way beyond just preparing food.

MAESTRO

120

110

90

70/60

40



INTEGRA 965



INTEGRA 665



CNL 6815 PLUS

INTEGRATION

EXTENDABLE

| TOTAL | | EASY | | |
|----------|---------------|---------|------------------|----------|
| 90 | 70/60 | 90 | 70/60 | |
| | | | | |
| CNL 9610 | GFG 2 | C 9420 | C 6420 C 6310 | |
| | | | | |
| | | | C 7310 | |
| | | | | |
| CNL 6415 | CNL 6400 | TL 9310 | TL 7420 | CNL 6400 |
| | | | | |
| CNL 6610 | CNL 6415 PLUS | C 9310 | | |



MAESTRO DHT 1285 ISLAND



- Ceiling hood
- Rim extraction
- EcoPower motor
- Energy Efficiency class: A
- Remote control panel
- Operating pilot light
- 6 speeds+ 4 intensive
- Exhaust capacities:
 - Free Outlet, m³/h: 920
 - Qboost, m³/h: 807
 - Max., m³/h: 631
 - Min. m³/h: 315
- Noise (LwA) Boost Speed, dB: 66
- Noise (LwA) Max Speed, dB: 60
- Noise (LwA) Min Speed, dB: 47
- 4 LED lamps
- 1 aluminium filter
- Stop delay timer
- Filer saturation indicator



MAESTRO DPL 1185






- Island hood
- Rim extraction
- EcoPower motor
- Energy Efficiency class: A
- Rim extraction
- Touch control White display
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet, m³/h: 920
 - Qboost, m³/h: 651
 - Max., m³/h: 629
 - Min., m³/h: 331
- Noise (LwA) Boost Speed, dB: 65.2
- Noise (LwA) Max Speed, dB: 66
- Noise (LwA) Min Speed, dB: 54
- LED illumination
- Reinforced black glass
- 2 hidden aluminum filters
- Stop delay timer
- Filter saturation indicator



MAESTRO CC 485 ISLAND



- Tubular island hood
- EcoPower motor
- Energy Efficiency class: A
- Touch control
- Digital display
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet, m³/h: 920
 - Qboost, m³/h: 771
 - Max., m³/h: 525
 - Min., m³/h: 305
- Noise (LwA) Boost Speed, dB: 78
- Noise (LwA) Max Speed, dB: 72
- Noise (LwA) Min Speed, dB: 50
- 2 LED lamps
- 1 stainless steel filter
- Stop delay timer
- Filter saturation indicator

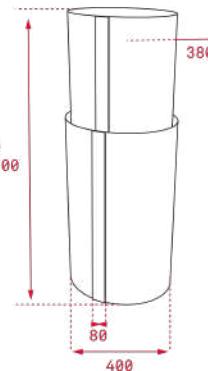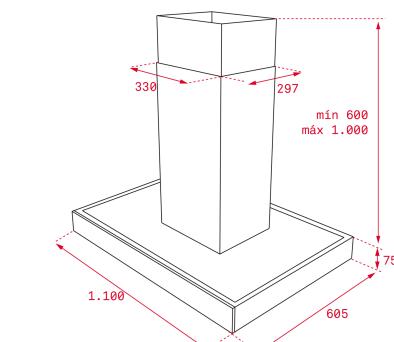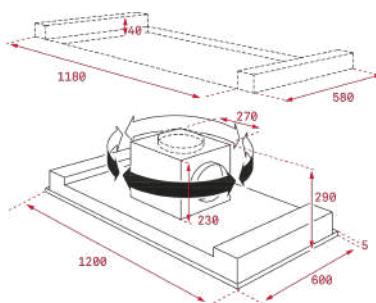

COLOR

Stainless Steel

COLOR

Black Glass

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 1200 mm

EXTERNAL DIMENSIONS

Height 1100 mm

EXTERNAL DIMENSIONS


Height 400 mm



MAESTRO DPL 1185 ISLAND



- Island hood
- Rim extraction
- EcoPower motor
- Energy Efficiency class: A
- 3 speeds+1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 920
- Qboost, m³/h: 782
- Max., m³/h: 629
- Min., m³/h: 331
- Noise (LwA) Boost Speed, dB: 69
- Noise (LwA) Max Speed, dB: 66
- Noise (LwA) Min Speed, dB: 54
- 4 LED lamps
- Inox panel
- 3 aluminum filters
- Reinforced black glass
- Stop delay timer
- Filter saturation indicator

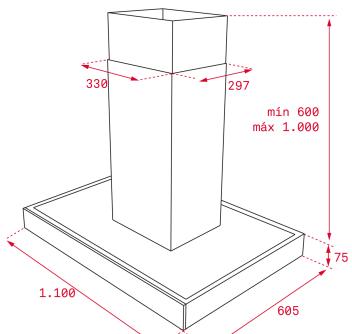

COLOR

Black Glass

EXTERNAL DIMENSIONS


Height 1100 mm



MAESTRO DH2 ISLA 1285



- Island hood
- EcoPower motor
- Energy Efficiency class: A
- Backlit electronic panel with white display
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 920
- Qboost, m³/h: 796
- Max., m³/h: 605
- Min., m³/h: 311
- Noise (LwA) Boost Speed, dB: 71
- Noise (LwA) Max Speed, dB: 66
- Noise (LwA) Min Speed, dB: 52
- 4 LED lamps
- 4/3 stainless steel-aluminium filters
- Reinforced Black Glass
- Easy to clean inside panel
- Stop delay timer
- Filter saturation indicator

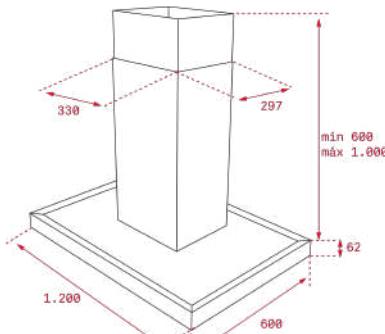

COLOR

Stainless Steel

EXTERNAL DIMENSIONS


Height 1200 mm



MAESTRO DH2 1280



- Island hood
- EcoPower motor
- Energy Efficiency class: D
- Electronic panel
- White display
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 850
- Qboost, m³/h: 650
- Max., m³/h: 400
- Min., m³/h: 295
- Noise (LwA) Boost Speed, dB: 66
- Noise (LwA) Max Speed, dB: 56
- Noise (LwA) Min Speed, dB: 48
- 4 LED lamps
- 4/3 stainless steel-aluminium filters
- Reinforced Black Glass
- Easy to clean inside panel
- Stop delay timer
- Filter saturation indicator

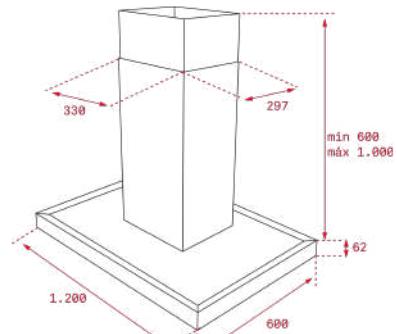

COLOR

Stainless Steel

EXTERNAL DIMENSIONS


Height 1200 mm



MAESTRO DH2 985 ISLAND



- Island hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic panel
- White display
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet, m³/h: 920
 - Qboost, m³/h: 796
 - Max., m³/h: 605
 - Min., m³/h: 311
- Noise (LwA) Boost Speed, dB: 71
- Noise (LwA) Max Speed, dB: 66
- Noise (LwA) Min Speed, dB: 52
- 4 LED lamps
- 4/3 stainless steel-aluminium filters
- Reinforced Black Glass
- Easy to clean inside panel
- Stop delay timer
- Filter saturation indicator

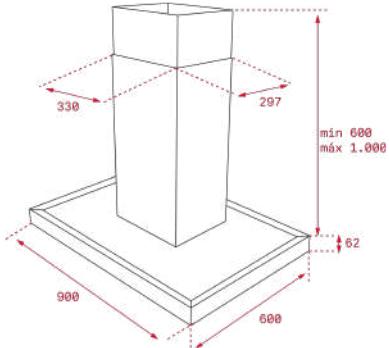

COLOR

Stainless Steel


EXTERNAL DIMENSIONS
Height 900 mm



MAESTRO DH2 980 ISLAND



- Island hood
- EcoPower motor
- Energy Efficiency class: D
- Electronic panel
- White display
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet, m³/h: 850
 - Qboost, m³/h: 650
 - Max., m³/h: 400
 - Min., m³/h: 295
- Noise (LwA) Boost Speed, dB: 66
- Noise (LwA) Max Speed, dB: 56
- Noise (LwA) Min Speed, dB: 48
- 4 LED lamps
- 4/3 stainless steel-aluminium filters
- Reinforced Black Glass
- Easy to clean inside panel
- Stop delay timer
- Filter saturation indicator

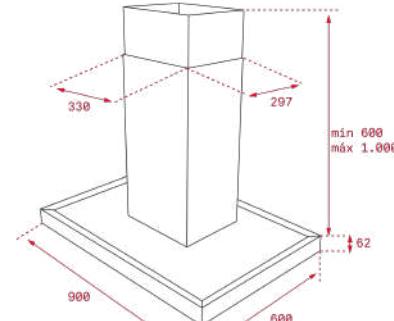

COLOR

Stainless Steel


EXTERNAL DIMENSIONS
Height 900 mm



TOTAL DG3 985 ISLAND



- Island hood
- Glass wing
- EcoPower motor
- Energy Efficiency class: A
- Backlit electronic panel with white display
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet, m³/h: 920
 - Qboost, m³/h: 796
 - Max., m³/h: 605
 - Min., m³/h: 311
- Noise (LwA) Boost Speed, dB: 71
- Noise (LwA) Max Speed, dB: 66
- Noise (LwA) Min Speed, dB: 52
- 4 LED lamps
- 2 stainless steel filters
- Reinforced transparent glass
- Stop delay timer
- Filter saturation indicator

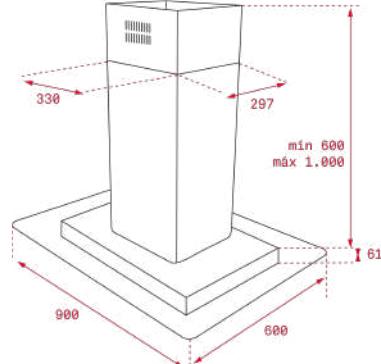

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 900 mm



TOTAL DG3 ISLA 980 ISLAND



- Island hood
- Glass wing
- EcoPower motor
- Energy Efficiency class: D
- Backlit electronic panel with white display
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 850
- Qboost, m³/h: 650
- Max., m³/h: 400
- Min., m³/h: 295
- Noise (LwA) Boost Speed, dB: 66
- Noise (LwA) Max Speed, dB: 56
- Noise (LwA) Min Speed, dB: 48
- 4 LED lamps
- 2 stainless steel filters
- Reinforced transparent glass
- Stop delay timer
- Filter saturation indicator

TOTAL DSB 985 ISLAND






- Island hood
- EcoPower motor
- Energy Efficiency class: A
- Backlit electronic panel with red display
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 920
- Qboost, m³/h: 796
- Max., m³/h: 605
- Min., m³/h: 311
- Noise (LwA) Boost Speed, dB: 71
- Noise (LwA) Max Speed, dB: 66
- Noise (LwA) Min Speed, dB: 52
- 4 LED lamps
- 3 aluminium filters
- Easy to clean inside panel
- Stop delay timer
- Filter saturation indicator

MAESTRO QUADRO DLV 998



- Quadro vertical hood
- EcoPower motor
- Energy Efficiency class: A++
- Rim extraction
- Touch control panel
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 890
- Qboost, m³/h: 815
- Max., m³/h: 626
- Min., m³/h: 264
- Noise (LwA) Boost Speed, dB: 64.7
- Noise (LwA) Max Speed, dB: 58.2
- Noise (LwA) Min Speed, dB: 37.4
- 1 LED bar
- 2 Glass panel; aluminum filter below
- Stop delay timer
- Filter saturation indicator

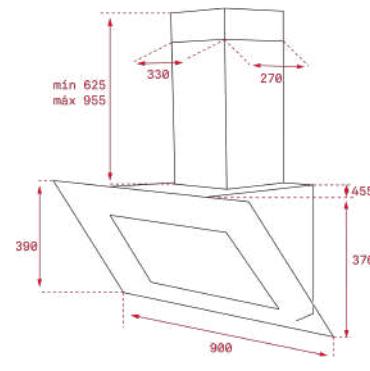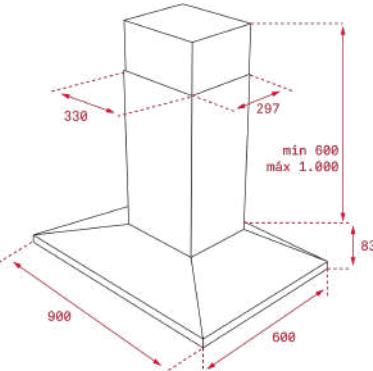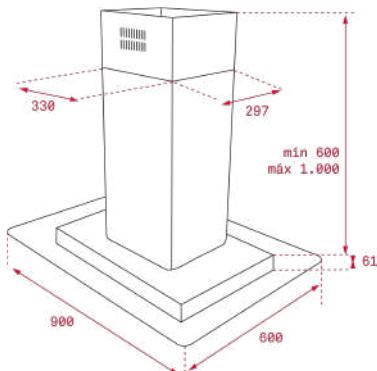

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 900 mm

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 900 mm

COLOR

Black Glass


EXTERNAL DIMENSIONS
Height 900 mm

HOODS



NEW

MAESTRO DLV 985



- Urban Colors Edition
- Quadro vertical hood
- Double turbine motor ECOPOWER
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Saturation filters lighting indicator
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- LED light bar
- Stop delay timer
- Recirculation function optional (SET D10CTP)



MAESTRO DLV 985



- Urban Colors Edition
- Quadro vertical hood
- Double turbine motor ECOPOWER
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Saturation filters lighting indicator
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- LED light bar
- Stop delay timer
- Recirculation function optional (SET D10CTP)




NEW

MAESTRO DLV 985




- Urban Colors Edition
- Quadro vertical hood
- Double turbine motor ECOPOWER
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Saturation filters lighting indicator
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- LED light bar
- Stop delay timer
- Recirculation function optional (SET D10CTP)

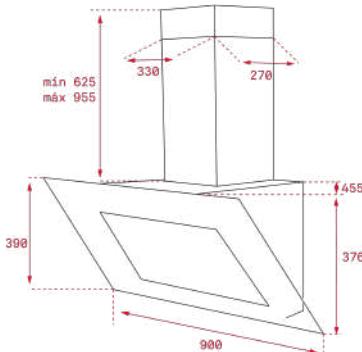


COLOR

Steam grey glass

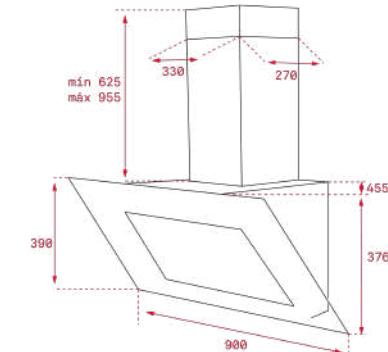

COLOR

Black Glass

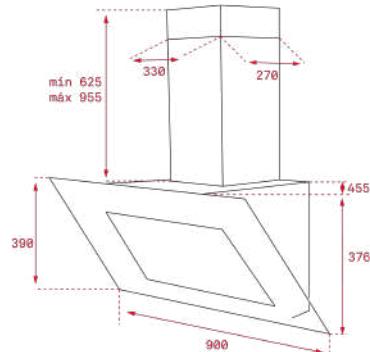

COLOR

White Glass

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS


Height 900 mm

EXTERNAL DIMENSIONS

Height 900 mm

**NEW****MAESTRO DLV 985**


- Urban Colors Edition
- Quadro vertical hood
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Stop delay timer
- LED light bar
- Saturation filters lighting indicator
- Double turbine motor ECOPOWER
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- Recirculation function optional (SET D10CTP)

**NEW****MAESTRO DLV 985**


- Urban Colors Edition
- Quadro vertical hood
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Stop delay timer
- LED light bar
- Saturation filters lighting indicator
- Double turbine motor ECOPOWER
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- Recirculation function optional (SET D10CTP)

**MAESTRO QUADRO DLV 980**


- Quadro vertical hood
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Stop delay timer
- LED light bar
- Saturation filters lighting indicator
- Double turbine motor ECOPOWER
- Exhaust capacity (*): min.278 m³/h - max.701 m³/h
- Sound level (*): min.42 dBA - máx.59 dBA
- Recirculation function optional (SET D10CTP)

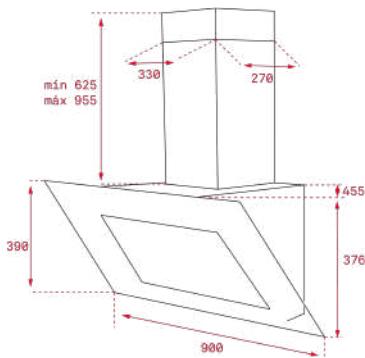**COLOR**

Stone grey glass

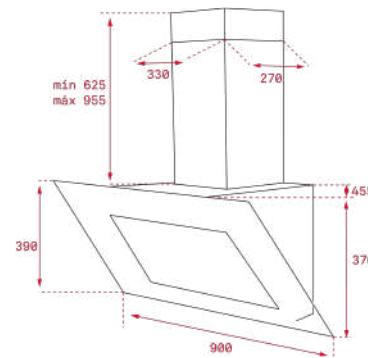**COLOR**

London brick brown glass

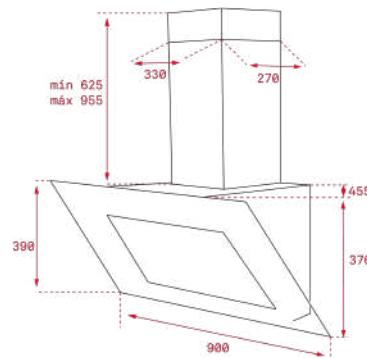**COLOR**

Black Glass

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS


Height 900 mm

HOODS



NEW

MAESTRO DLV 685



- Urban Colors Edition
- Quadro vertical hood
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Stop delay timer
- LED light bar
- Saturation filters lighting indicator
- Double turbine motor ECOPOWER
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- Recirculation function optional (SET D10CTP)



MAESTRO DLV 685



- Urban Colors Edition
- Quadro vertical hood
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Stop delay timer
- LED light bar
- Saturation filters lighting indicator
- Double turbine motor ECOPOWER
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- Recirculation function optional (SET D10CTP)




NEW

MAESTRO DLV 685




- Urban Colors Edition
- Quadro vertical hood
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Stop delay timer
- LED light bar
- Saturation filters lighting indicator
- Double turbine motor ECOPOWER
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- Recirculation function optional (SET D10CTP)

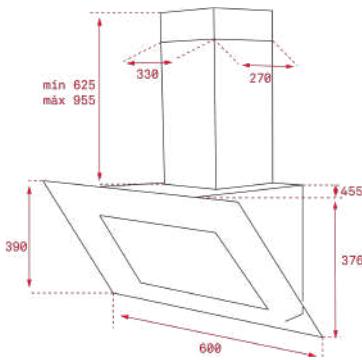


COLOR

Steam grey glass

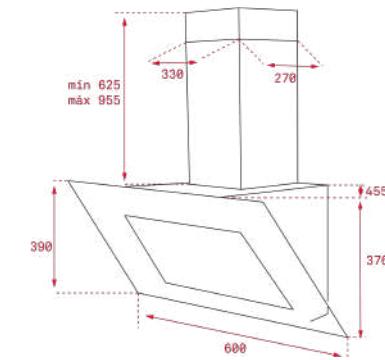

COLOR

Black Glass

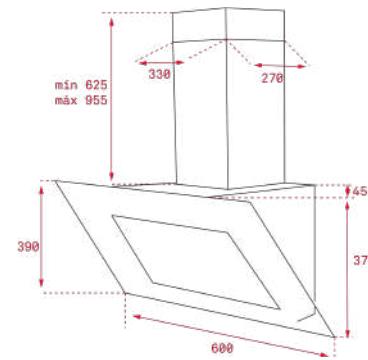

COLOR

White Glass

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

**NEW****MAESTRO DLV 685**




- Urban Colors Edition
- Quadro vertical hood
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Stop delay timer
- LED light bar
- Saturation filters lighting indicator
- Double turbine motor ECOPOWER
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- Recirculation function optional (SET D10CTP)

**NEW****MAESTRO DLV 685**

- Urban Colors Edition
- Quadro vertical hood
- Extraction rim system "Contour"
- Digital control Touch Control with white display
- 3 speeds + Intensive
- Stop delay timer
- LED light bar
- Saturation filters lighting indicator
- Double turbine motor ECOPOWER
- Exhaust capacity (*): min.325 m³/h - max.782 m³/h
- Sound level (*): min.54 dBA - máx.65 dBA
- Recirculation function optional (SET D10CTP)

**MAESTRO DVT 985**

- Vertical decorative hood
- Eco power
- Touch control panel
- Rim extraction
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet (m³/h): 895
 - Max. (m³/h): 786
 - Min. (m³/h): 303
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 52 dB
- LED illumination
- 1 aluminium filter
- Stop delay timer
- Filter saturation indicator

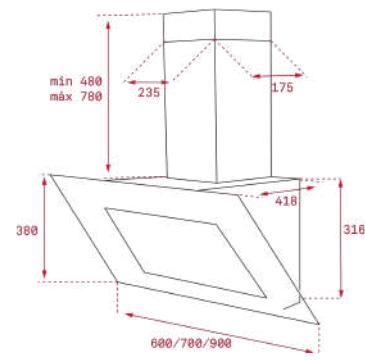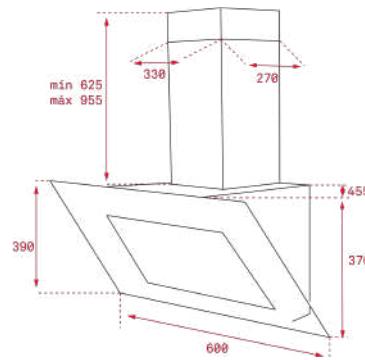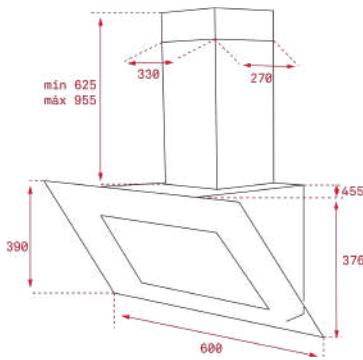**COLOR**

Stone grey glass

COLOR

London brick brown glass

COLOR

Black Glass

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 900 mm

HOODS



MAESTRO DVT 985



- Vertical decorative hood
- Eco power
- Touch control panel
- Rim extraction
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 895
- Max. (m³/h): 786
- Min. (m³/h): 303
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 52 dB
- LED illumination
- 1 aluminium filter
- Stop delay timer
- Filter saturation indicator



MAESTRO DVT 785






- Vertical decorative hood
- Eco power
- Touch control panel
- Rim extraction
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 895
- Max. (m³/h): 786
- Min. (m³/h): 303
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 52 dB
- LED illumination
- 1 aluminium filter
- Stop delay timer
- Filter saturation indicator



MAESTRO DVT 785



- Vertical decorative hood
- Eco power
- Touch control panel
- Rim extraction
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 895
- Max. (m³/h): 786
- Min. (m³/h): 303
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 52 dB
- LED illumination
- 1 aluminium filter
- Stop delay timer
- Filter saturation indicator

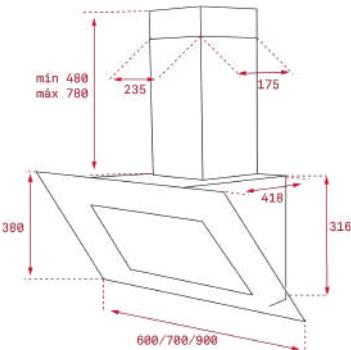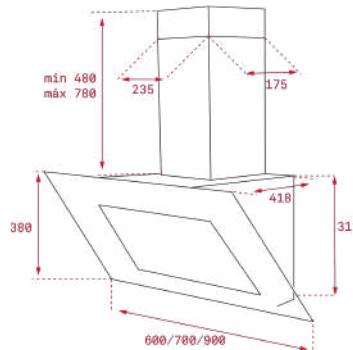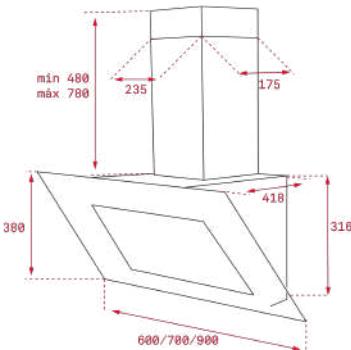

COLOR

White Glass

COLOR

Black Glass

COLOR

White Glass

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 700 mm

EXTERNAL DIMENSIONS

Height 700 mm



MAESTRO DVT 685



- Vertical decorative hood
- Eco power
- Touch control panel
- Rim extraction
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet (m³/h): 895
 - Max. (m³/h): 786
 - Min. (m³/h): 303
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 52 dB
- LED illumination
- 1 aluminium filter
- Stop delay timer
- Filter saturation indicator



MAESTRO DVT 685






- Vertical decorative hood
- Eco power
- Touch control panel
- Rim extraction
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet (m³/h): 895
 - Max. (m³/h): 786
 - Min. (m³/h): 303
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 52 dB
- LED illumination
- 1 aluminium filter
- Stop delay timer
- Filter saturation indicator



MAESTRO DVU 590



- Vertical decorative hood
- Touch control panel
- Remote control
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 553
 - Max. (m³/h): 538
 - Min. (m³/h): 443
- Noise (LwA) Max Speed 59 dB
- Noise (LwA) Min Speed 50 dB
- LED illumination
- 2 aluminium filters
- Stop delay timer

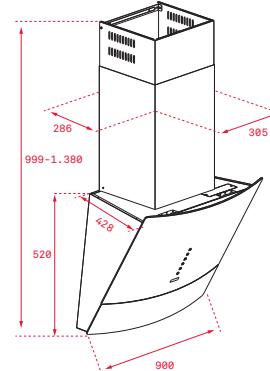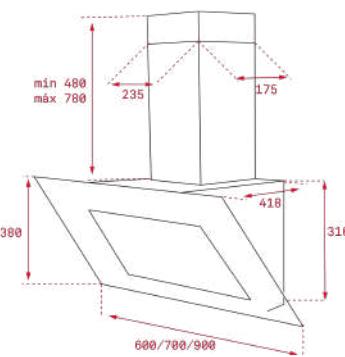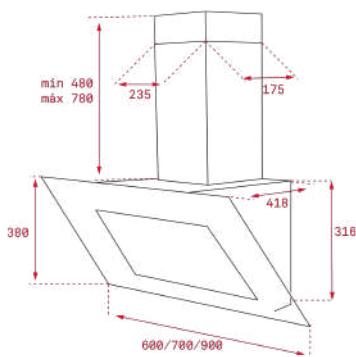

COLOR

Black Glass

COLOR

White Glass

COLOR

Black Glass

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 900 mm



MAESTRO DVU 590



- Vertical decorative hood
- Touch control panel
- Remote control
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 553
 - Max. (m³/h): 538
 - Min. (m³/h): 443
- Noise (LwA) Max Speed 59 dB
- Noise (LwA) Min Speed 50 dB
- LED illumination
- 2 aluminium filters
- Stop delay timer



MAESTRO DVF 97670 TBS




- Vertical decorative hood
- Fresh air function
- Energy efficiency class: A++
- Extraction rim system "Contour"
- Touch control panel
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet (m³/h): 740
 - Max. (m³/h): 400
 - Min. (m³/h): 270
- Noise (LwA) Max Speed 59 dB
- Noise (LwA) Min Speed 53 dB
- LED illumination
- 1 aluminium filter with 6 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional



MAESTRO DVF 97670 TBS




- Vertical decorative hood
- Fresh air function
- Touch control panel
- Extraction rim system "Contour"
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet (m³/h): 740
 - Max. (m³/h): 400
 - Min. (m³/h): 270
- Noise (LwA) Max Speed 59 dB
- Noise (LwA) Min Speed 53 dB
- LED illumination
- 1 aluminium filter with 6 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional

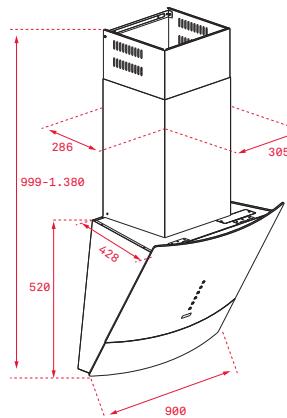

COLOR




EXTERNAL DIMENSIONS
Height 900 mm

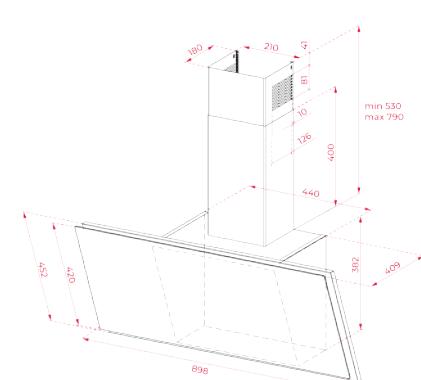

COLOR



EXTERNAL DIMENSIONS
Height 898 mm

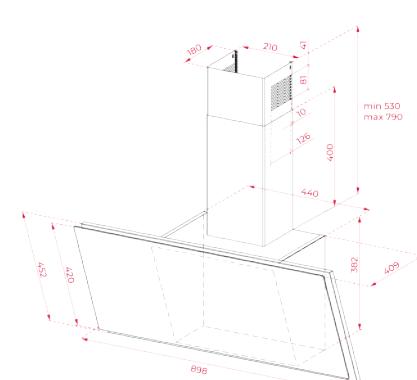

COLOR



EXTERNAL DIMENSIONS
Height 898 mm

**NEW****MAESTRO DVF 67670 TBS**




- Vertical decorative hood
- Fresh air function
- Energy efficiency class: A++
- Extraction rim system "Contour"
- Touch control panel
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 740
- Max. (m³/h): 400
- Min. (m³/h): 270
- Noise (LwA) Max Speed 59 dB
- Noise (LwA) Min Speed 53 dB
- LED illumination
- 1 aluminium filter with 6 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional

**NEW****MAESTRO DVF 67670 TBS**

- Vertical decorative hood
- Fresh air function
- Energy efficiency class: A++
- Extraction rim system "Contour"
- Touch control panel
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 740
- Max. (m³/h): 400
- Min. (m³/h): 270
- Noise (LwA) Max Speed 59 dB
- Noise (LwA) Min Speed 53 dB
- LED illumination
- 1 aluminium filter with 6 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional

**NEW****EASY DVN 94030 TTC**

- Vertical decorative hood
- Energy efficiency class: C
- Extraction rim system "Contour"
- Touch control panel
- 2 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 460
- Max. (m³/h): 410
- Min. (m³/h): 380
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 65 dB
- LED illumination
- 1 aluminium filter with 4 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional

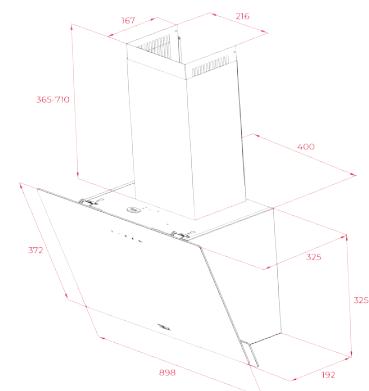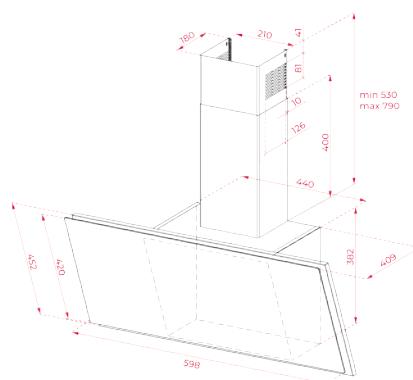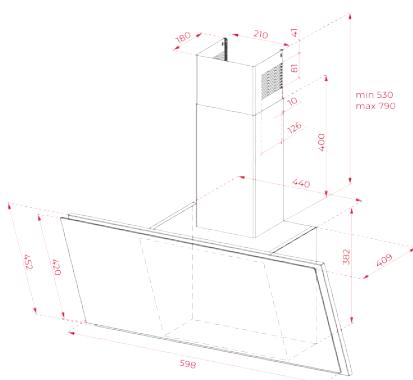**COLOR**

Black Glass

EXTERNAL DIMENSIONS

Height 598 mm

COLOR

White Glass

EXTERNAL DIMENSIONS

Height 598 mm

COLOR

Black Glass

EXTERNAL DIMENSIONS

Height 898 mm



NEW

EASY DVN 94030 TTC



- Vertical decorative hood
- Energy efficiency class: C
- Extraction rim system "Contour"
- Touch control panel
- 2 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 460
- Max. (m³/h): 410
- Min. (m³/h): 380
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 65 dB
- LED illumination
- 1 aluminium filter with 4 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional

NEW

EASY DVN 74030 TTC






- Vertical decorative hood
- Energy efficiency class: C
- Extraction rim system "Contour"
- Touch control panel
- 2 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 460
- Max. (m³/h): 410
- Min. (m³/h): 380
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 65 dB
- LED illumination
- 1 aluminium filter with 4 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional

NEW

EASY DVN 74030 TTC



- Vertical decorative hood
- Energy efficiency class: C
- Extraction rim system "Contour"
- Touch control panel
- 2 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 460
- Max. (m³/h): 410
- Min. (m³/h): 380
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 65 dB
- LED illumination
- 1 aluminium filter with 4 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional

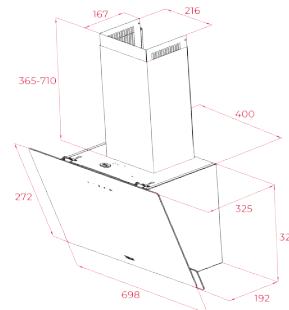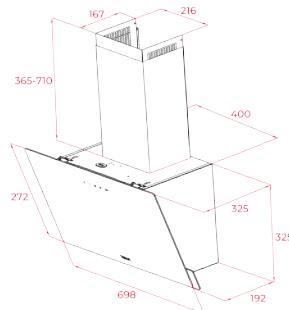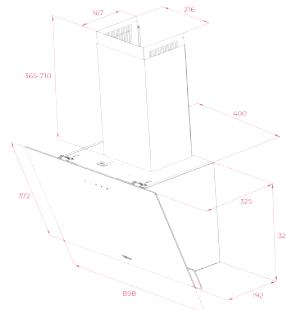

COLOR

White Glass

COLOR

Black Glass

COLOR

White Glass

EXTERNAL DIMENSIONS

Height 898 mm

EXTERNAL DIMENSIONS

Height 698 mm

EXTERNAL DIMENSIONS

Height 698 mm



NEW

EASY DVN 64030 TTC



- Vertical decorative hood
- Energy efficiency class: C
- Extraction rim system "Contour"
- Touch control panel
- 2 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 460
- Max. (m³/h): 410
- Min. (m³/h): 380
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 65 dB
- LED illumination
- 1 aluminium filter with 4 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional



NEW

EASY DVN 64030 TTC



- Vertical decorative hood
- Energy efficiency class: C
- Extraction rim system "Contour"
- Touch control panel
- 2 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 460
- Max. (m³/h): 410
- Min. (m³/h): 380
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 65 dB
- LED illumination
- 1 aluminium filter with 4 layers
- Stop delay timer
- Filter saturation indicator
- Recirculation function optional Set D11CTP
- Regenerative Charcoal filters optional






MAESTRO PERFECTA4 DLH 1185T

T



- Ultraslim decorative hood
- EcoPower motor
- Energy Efficiency class: A
- 4A (Energy efficiency A, Fluid dynamic efficiency A, lighting efficiency A, grease filtering efficiency A)
- Touch control panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 795
- Qboost, m³/h: 740
- Max., m³/h: 586
- Min., m³/h: 306
- Noise (LwA) Boost Speed, dB: 72
- Noise (LwA) Max Speed, dB: 68
- Noise (LwA) Min Speed, dB: 54
- 1 LED BAR
- 3 stainless steel filters (12 layers)
- Stop delay timer
- Filter saturation indicator

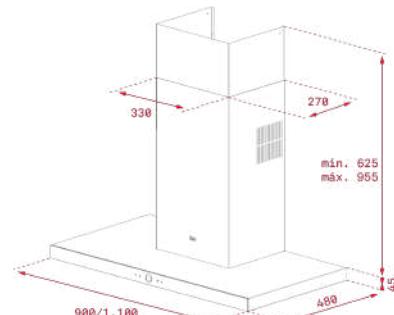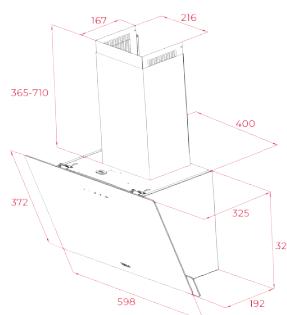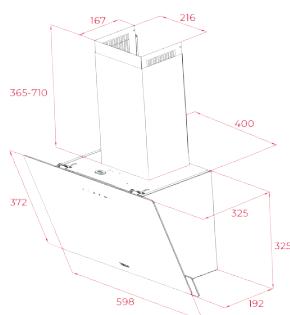

COLOR

Black Glass

EXTERNAL DIMENSIONS

Height 598 mm

COLOR

White Glass

EXTERNAL DIMENSIONS

Height 598 mm

COLOR

Black Glass

EXTERNAL DIMENSIONS

Height 1100 mm

HOODS




MAESTRO PERFECTA4 DLH 985

T



- Ultraslim decorative hood
- EcoPower motor
- Energy Efficiency class: A
- 4A (Energy efficiency A, Fluid dynamic efficiency A, lighting efficiency A, grease filtering efficiency A)
- Touch control panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 795
- Qboost, m³/h: 740
- Max., m³/h: 586
- Min., m³/h: 306
- Noise (LwA) Boost Speed, dB: 72
- Noise (LwA) Max Speed, dB: 68
- Noise (LwA) Min Speed, dB: 54
- 1 LED BAR
- 3 stainless steel filters (12 layers)
- Stop delay timer
- Filter saturation indicator

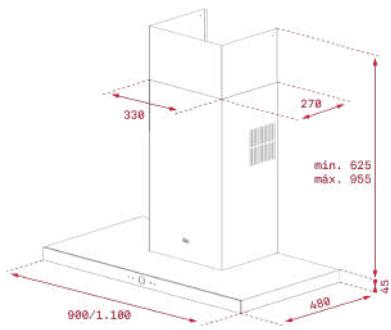


COLOR

Black Glass

MAESTRO DLH 1186 T



- Decorative hood
- Double turbine armored motor EcoPower
- Power Rating: A +
- Touch Control digital controls with white display
- 3 speeds + intensive
- Selected speed digital indicator
- Aspiration timer
- Non-Return Valve
- Extraction capacities (*): min. 303 m³ / h - max. 701 m³ / h
- Sound power (*): min. 53 dBA - max. 69 dBA
- LED Lighting BarStainless steel decorative filters
- Filter saturation indicator light
- Possibility of operation in recirculation (SET D1CTP)
- (*) Delegated Regulation (EU) No 65/2014 of the Commission of 1 October 2013.

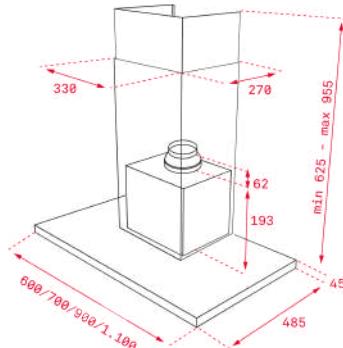

COLOR

Black Glass

EXTERNAL DIMENSIONS


Height 1200 mm



MAESTRO DPL 986 T



- Decorative hood
- Backlit digital controls with white display
- Double turbine armored motor EcoPower
- 3 speeds + intensive
- Selected speed digital indicator
- Aspiration timer
- Filter saturation indicator light
- Non-Return Valve
- 4 LED lamps
- Possibility of operation in recirculation (SET 1 / T1)

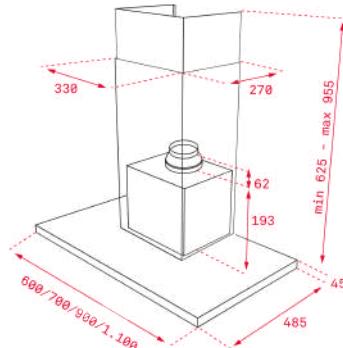

COLOR

Black Glass

EXTERNAL DIMENSIONS

Height 900 mm



MAESTRO DLH 986 T



- Decorative hood
- Double turbine armored motor EcoPower
- Power Rating: A +
- Touch Control digital controls with white display
- 3 speeds + intensive
- Selected speed digital indicator
- Aspiration timer
- Filter saturation indicator light
- Non-Return Valve
- Extraction capacities (*): min. 303 m³ / h - max. 701 m³ / h
- Sound power (*): min. 53 dBA - max. 69 dBA
- LED Lighting Bar
- Stainless steel decorative filters
- Possibility of operation in recirculation (SET D1CTP)
- (*) Delegated Regulation (EU) No 65/2014 of the Commission of 1 October 2013.



MAESTRO DLH 786 T






- Decorative hood
- EcoPower motor
- Energy Efficiency class: A+
- Touch control panel with white display
- 3 speeds + 1 intensive
- Exhaust capacities(*): min. 303 m³/h - máx. 701 m³/h
- Noise(*): min. 53 dBA - máx. 69 dBA
- 1 LED BAR
- Stainless steel filters
- Filter saturation indicator
- Possibility of recirculation (SET D1CTP)



MAESTRO DLH 686 T



- EcoPower motor
- Energy Efficiency class: A+
- Touch control with white display
- 3 speeds + 1 intensive
- Exhaust capacities(*): min. 303 m³/h - máx. 701 m³/h
- Noise(*): min. 53 dBA - máx. 69 dBA
- 1LED bar
- Stainless steel filters
- Filter saturation indicator
- Stop delay timer
- Possibility of recirculation (SET D1CTP)

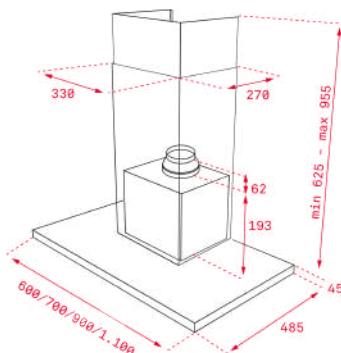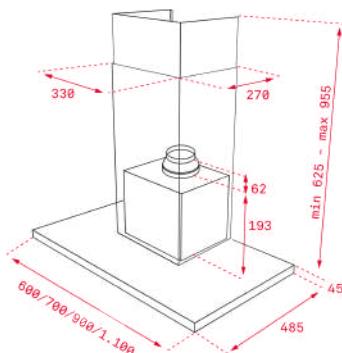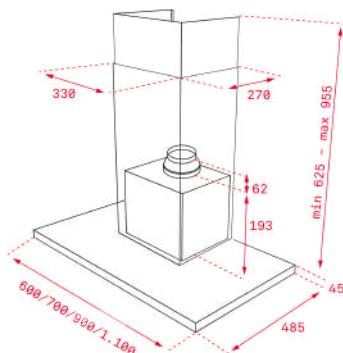

COLOR

Black Glass

EXTERNAL DIMENSIONS

Height 900 mm

COLOR

Black Glass

EXTERNAL DIMENSIONS

Height 900 mm

COLOR

Black Glass

EXTERNAL DIMENSIONS


Height 600 mm



MAESTRO DU 985



- Vertical decorative hood
- EcoPower motor
- Energy Efficiency class: A
- Touch control White display
- Operating pilot light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 920
- Qboost, m³/h: 807
- Max., m³/h: 631
- Min., m³/h: 315
- Noise (LwA) Boost Speed, dB: 72
- Noise (LwA) Max Speed, dB: 68
- Noise (LwA) Min Speed, dB: 56
- Noise (LwA) Min Speed dB: 48 dB
- 4 LED lamps
- 1 stainless steel filter
- Easy to clean inside panel
- Stop delay timer
- Filter saturation indicator

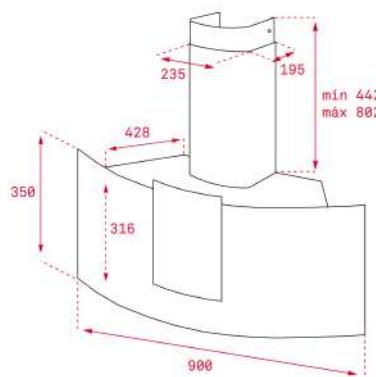

COLOR


Black Glass

EXTERNAL DIMENSIONS


Height 900 mm



TOTAL DPS 986



- Decorative hood
- EcoPower motor
- Rim extraction
- Touch control panel
- 3 speeds + 1 intensive
- Exhaust capacities:
- Max. (m³/h): 722
- Min. (m³/h): 320
- Noise (LwA) Max Speed 67 dB
- Noise (LwA) Min Speed 54 dB
- LED ilumination
- Filter saturation indicator

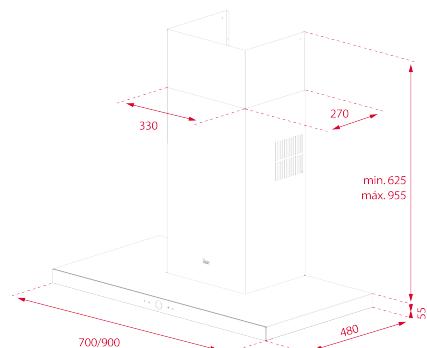

COLOR

Stainless Steel

EXTERNAL DIMENSIONS


Height 900 mm



TOTAL DPS 786



- Decorative hood
- Eco power
- Rim extraction
- Touch control panel
- 3 speeds + 1 intensive
- Exhaust capacities:
- Max. (m³/h): 722
- Min. (m³/h): 320
- Noise (LwA) Max Speed 67 dB
- Noise (LwA) Min Speed 54 dB
- LED ilumination
- Filter saturation indicator

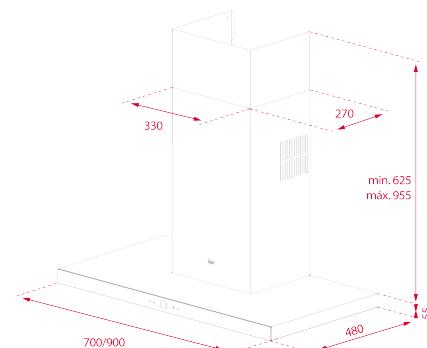

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 900 mm




TOTAL DSH 985



- EcoPower motor
- Energy Efficiency class: A
- Electronic control
- Digital display
- 3 speeds + 1 intensive
- Stop delay timer
- Noise(*): min. 54 dBA - máx. 68 dBA
- LED Light Bar
- 2 Stainless steel filters
- Stop delay timer
- Filter saturation indicator



TOTAL DSH 785




- Backlit electronic controls
- Digital Display
- LED Lighting Bar
- Three speeds + intensive
- Selected speed digital indicator
- Aspiration timer
- Stainless steel decorative filters
- Double turbine armored motor EcoPower
- Non-Return Valve
- Extraction capacities (*): min. 305 m³ / h - max. 735 m³ / h
- Sound power (*): min. 54 dBA - max. 68dBA
- Possibility of operation in recirculation (SET 1 / N1)
- Power Rating: A
- (*) Delegated Regulation (EU) No 65/2014 of the Commission of 1 October 2013.



TOTAL DSH 685



- Double turbine armored motor EcoPower
- Energy Efficiency class: A
- Backlit electronic controls
- Digital Display
- Selected speed digital indicator
- Aspiration timer
- Non-Return Valve
- 3 speeds + intensive
- Extraction capacities (*): min. 305 m³ / h - max. 735 m³ / h
- Sound power (*): min. 54 dBA - max. 68dBA
- LED Lighting Bar
- Stainless steel decorative filters
- Possibility of operation in recirculation (SET 1 / N1)
- (*) Delegated Regulation (EU) No 65/2014 of the Commission of 1 October 2013.

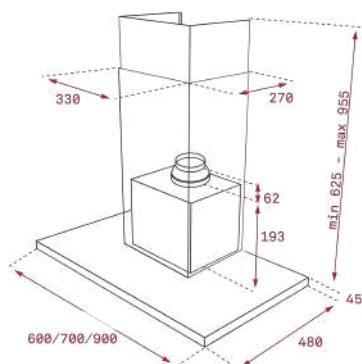


COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 900 mm

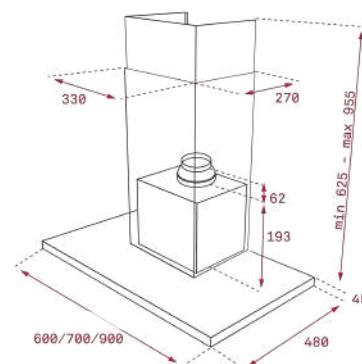


COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 900 mm

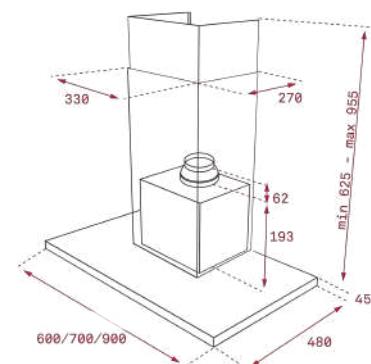

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 600 mm



EASY DSJ 980



- Ultraslim decorative hood
- Push Buttons Control Panel
- Operating Pilot Light
- Conventional Aspiration Type
- 3 speeds
- Exhaust capacities:
- Free Outlet (m³/h): 638
- Max. (m³/h): 614
- Min. (m³/h): 268
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 48 dB
- Integrated LED Light
- 3 stainless Steel-aluminum Filter



EASY DSJ 680




- Decorative hood in 60 cm
- Ultra slim
- 4 extraction speeds
- Push button control
- Operating pilot light
- Exhaust capacities: Max. nominal power 1,200 m³/h
- 2 LED lamps
- 2 Aluminium filter



EASY DSJ 950




- Ultraslim decorative hood
- Double turbine motor
- Energy Efficiency class: D
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
- Max. (m³/h): 401
- Min. (m³/h): 231
- Noise (LwA) Max Speed 58 dB
- Noise (LwA) Min Speed 43 dB
- 2 LED illumination
- 3 stainless steel-aluminum filter
- Possibility of operation in recirculation (SET D1CTP)

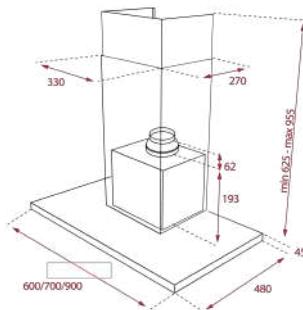


COLOR

Stainless Steel

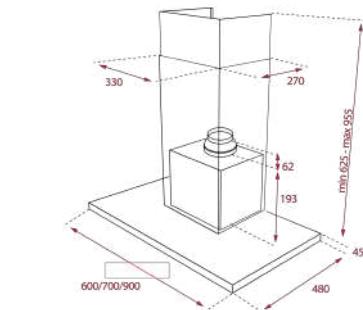

COLOR

Stainless Steel

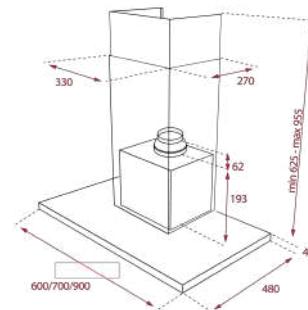

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 900 mm



EASY DSJ 750



- Ultraslim decorative hood
- Double turbine motor
- Energy Efficiency class: D
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Max. (m³/h): 401
 - Min. (m³/h): 231
- Noise (LwA) Max Speed 58 dB
- Noise (LwA) Min Speed 43 dB
- 2 LED illumination
- 2 stainless steel-aluminium filter
- Possibility of operation in recirculation (SET D1CTP)



EASY DSJ 650




- Ultraslim decorative hood
- Double turbine motor
- Energy Efficiency class: D
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Max. (m³/h): 401
 - Min. (m³/h): 231
- Noise (LwA) Max Speed 58 dB
- Noise (LwA) Min Speed 43 dB
- 2 LED illumination
- 2 stainless steel-aluminium filter
- Possibility of operation in recirculation (SET D1CTP)



MAESTRO DQ2 985




- Glass wing decorative hood
- EcoPower motor
- Energy Efficiency class: A
- Backlit electronic panel with white display
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet, m³/h: 920
 - Qboost, m³/h: 807
 - Max., m³/h: 631
 - Min., m³/h: 315
- Noise (LwA) Boost Speed, dB: 72
- Noise (LwA) Max Speed, dB: 68
- Noise (LwA) Min Speed, dB: 56
- 3 LED lamps
- 2 stainless steel filters
- Reinforced glass upper structure
- Easy to clean inside panel
- Stop delay timer
- Filter saturation indicator

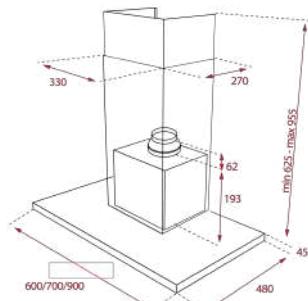


COLOR

Stainless Steel

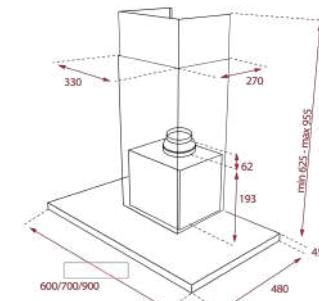

COLOR

Stainless Steel

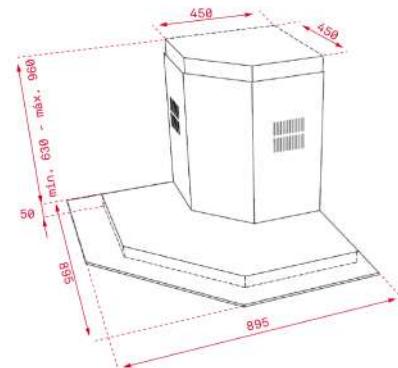

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 895 mm



TOTAL DG 985



- Ultraslim glass wing decorative hood
- Eco power
- Backlit electronic panel with white display
- Conventional aspiration
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 895
- Max. (m³/h): 807
- Min. (m³/h): 315
- Noise (LwA) Max Speed 68 dB
- Noise (LwA) Min Speed 56 dB
- LED illumination
- 1 stainless steel-aluminium filter
- Stop delay timer
- Reinforced glass upper structure



TOTAL DG 785






- Ultraslim glass wing decorative hood
- Eco power
- Backlit electronic panel with white display
- Conventional aspiration
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 895
- Max. (m³/h): 807
- Min. (m³/h): 315
- Noise (LwA) Max Speed 68 dB
- Noise (LwA) Min Speed 56 dB
- LED illumination
- 1 stainless steel-aluminium filter
- Stop delay timer
- Reinforced glass upper structure



TOTAL NC 985



- Ultraslim glass wing decorative hood
- Eco power
- Backlit electronic panel with white display
- Conventional aspiration
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 895
- Max. (m³/h): 807
- Min. (m³/h): 315
- Noise (LwA) Max Speed 68 dB
- Noise (LwA) Min Speed 56 dB
- LED illumination
- 1 stainless steel-aluminium filter
- Stop delay timer
- Reinforced glass upper structure

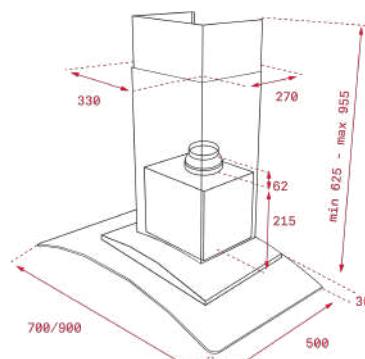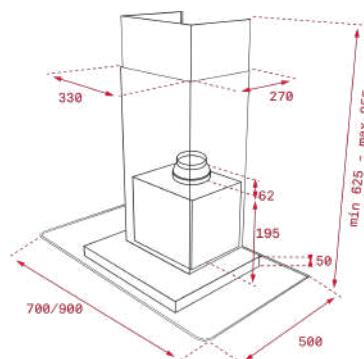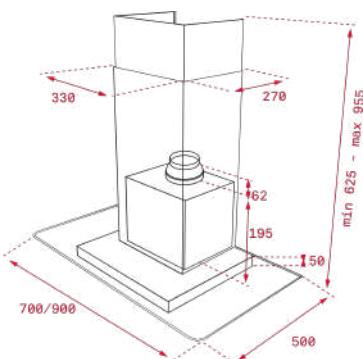

COLOR

Stainless Steel Glass Wing

COLOR

Stainless Steel Glass Wing

COLOR

Stainless Steel Glass Wing

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 700 mm

EXTERNAL DIMENSIONS

Height 900 mm

**TOTAL NC 785**




- Ultraslim glass wing decorative hood
- Eco power
- Backlit electronic panel with white display
- Conventional aspiration
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet (m³/h): 895
- Max. (m³/h): 807
- Min. (m³/h): 315
- Noise (LwA) Max Speed 68 dB
- Noise (LwA) Min Speed 56 dB
- LED illumination
- 1 stainless steel-aluminium filter
- Stop delay timer
- Reinforced glass upper structure

**EASY DG 650**

- Ultraslim glass wing decorative hood
- Push button control panel
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
- Free Outlet (m³/h): 475
- Max. (m³/h): 380
- Min. (m³/h): 234
- Noise (LwA) Max Speed 64 dB
- Noise (LwA) Min Speed 49 dB
- Integrated halogen lamps
- 1 aluminium filter
- Reinforced glass upper structure

**TOTAL DSS 985**

- Pyramidal decorative hood
- EcoPower motor
- Energy Efficiency class: A
- Illuminated push buttons
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 792
- Qboost, m³/h: 760
- Max., m³/h: 597
- Min., m³/h: 303
- Noise (LwA) Boost Speed, dB: 72,5
- Noise (LwA) Max Speed, dB: 68,2
- Noise (LwA) Min Speed, dB: 53,7
- 3 Stainless steel filters
- LED bar illumination
- Stop delay timer

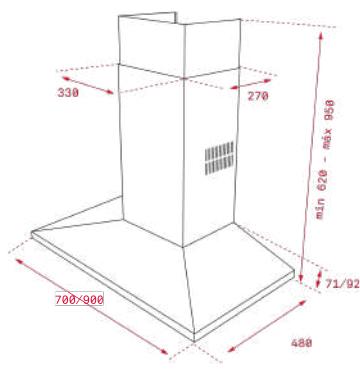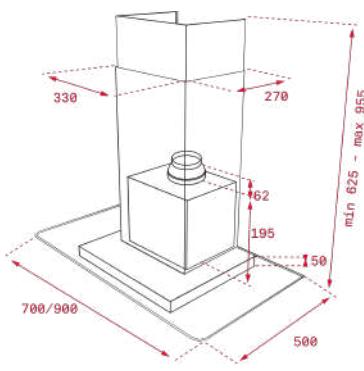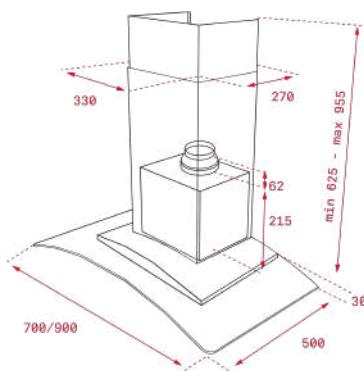**COLOR**

Stainless Steel Glass Wing

EXTERNAL DIMENSIONS

Height 700 mm

COLOR

Stainless Steel Glass Wing

EXTERNAL DIMENSIONS

Height 600 mm

COLOR

Stainless Steel


EXTERNAL DIMENSIONS

Height 900 mm

HOODS



TOTAL DSS 785



- Pyramidal decorative hood
- EcoPower motor
- Energy Efficiency class: A
- Illuminated push buttons
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 792
- Qboost, m³/h: 760
- Max., m³/h: 597
- Min., m³/h: 303
- Noise (LwA) Boost Speed, dB: 72.5
- Noise (LwA) Max Speed, dB: 68.2
- Noise (LwA) Min Speed, dB: 53.7
- 1 LED bar
- 3/2 Stainless Steel filters MMX
- Stop delay timer



TOTAL DM 975




- Pyramidal decorative hood
- Energy Efficiency class: A
- Push buttons Control Panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 650
- Max., m³/h: 603
- Min., m³/h: 283
- Noise (LwA) Max Speed, dB: 67
- Noise (LwA) Min Speed, dB: 53
- 2 LED lamps
- 3/2 Stainless Steel filters



TOTAL DM 975




- Pyramidal decorative hood
- Energy Efficiency class: A
- Push buttons Control Panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 650
- Max., m³/h: 603
- Min., m³/h: 283
- Noise (LwA) Max Speed, dB: 67
- Noise (LwA) Min Speed, dB: 53
- 2 LED lamps
- 3/2 Stainless Steel filters

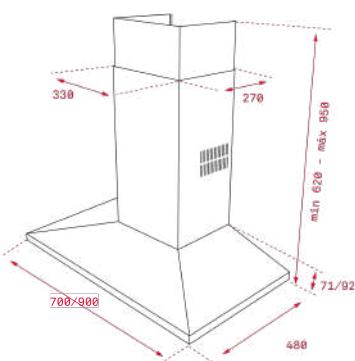


COLOR

Stainless Steel

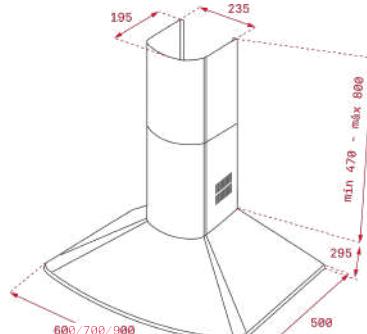

COLOR

Stainless Steel

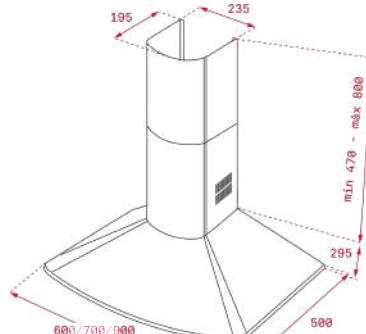

COLOR

White

EXTERNAL DIMENSIONS

Height 700 mm

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 900 mm



TOTAL DM 775



- Pyramidal decorative hood
- Energy Efficiency class: A
- Push buttons Control Panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 650
- Max., m³/h: 603
- Min., m³/h: 283
- Noise (LwA) Max Speed, dB: 67
- Noise (LwA) Min Speed, dB: 53
- 2 LED lamps
- 3/2 Stainless Steel filters



TOTAL DM 775






- Pyramidal decorative hood
- Energy Efficiency class: A
- Push buttons Control Panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 650
- Max., m³/h: 603
- Min., m³/h: 283
- Noise (LwA) Max Speed, dB: 67
- Noise (LwA) Min Speed, dB: 53
- 2 LED lamps
- 3/2 Stainless Steel filters



TOTAL DM 675



- Pyramidal decorative hood
- Energy Efficiency class: A
- Push buttons Control Panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 650
- Max., m³/h: 603
- Min., m³/h: 283
- Noise (LwA) Max Speed, dB: 67
- Noise (LwA) Min Speed, dB: 53
- 2 LED lamps
- 3/2 Stainless Steel filters

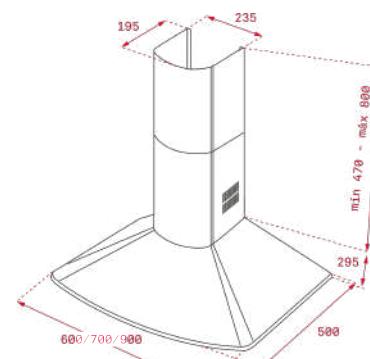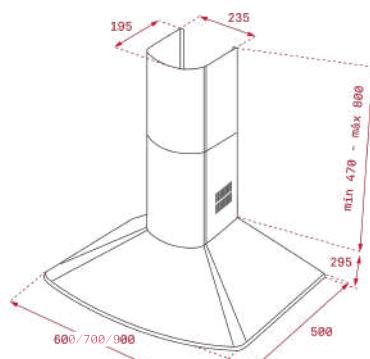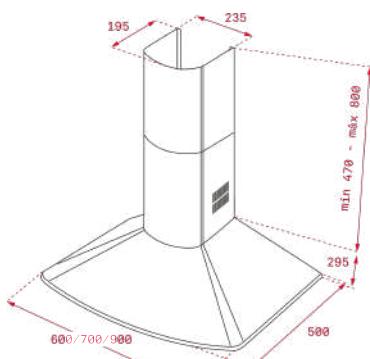

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 700 mm

COLOR

White

EXTERNAL DIMENSIONS

Height 700 mm

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 600 mm

HOODS



TOTAL DM 675



- Pyramidal decorative hood
- Energy Efficiency class: A
- Push buttons Control Panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 650
- Max., m³/h: 603
- Min., m³/h: 283
- Noise (LwA) Max Speed, dB: 67
- Noise (LwA) Min Speed, dB: 53
- 2 LED lamps
- 3/2 Stainless Steel filters



TOTAL DMR 975




- Rustic decorative hood
- Energy Efficiency class: A
- Push buttons control panel
- Operating Pilot Light
- 3 speeds + 1 intensive
- Exhaust capacities:
- Free Outlet, m³/h: 650
- Max., m³/h: 603
- Min., m³/h: 283
- Noise (LwA) Max Speed, dB: 67
- Noise (LwA) Min Speed, dB: 53
- 2 LED lamps
- 3 aluminium filters



TOTAL DOS 90.1 AT


- Rustic decorative hood
- Electronic control panel
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
- Free Outlet (m³/h): 650
- Max. (m³/h): 603
- Min. (m³/h): 256
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 51 dB
- Integrated halogen lamps
- 2 aluminium filters

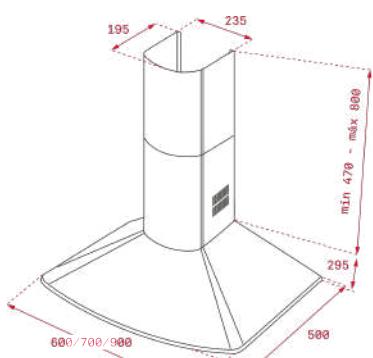

COLOR




White

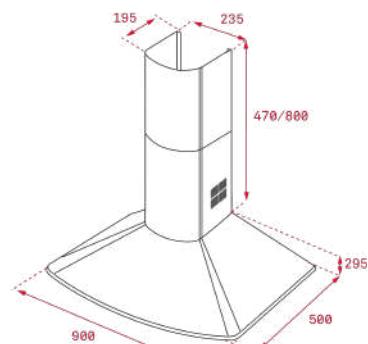

COLOR



Anthracite Brass

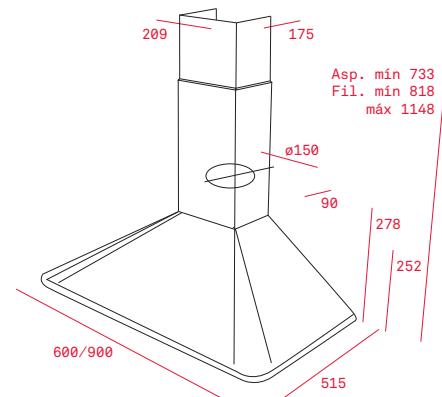

COLOR



Anthracite Brass

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 600/900mm



TOTAL DOS 90.1 VN

- Rustic decorative hood
- Electronic control panel
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 650
 - Max. (m³/h): 603
 - Min. (m³/h): 256
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 51 dB
- Integrated halogen lamps
- 2 aluminium filters






TOTAL DOS 60.1 AT

- Rustic decorative hood
- Electronic control panel
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 650
 - Max. (m³/h): 603
 - Min. (m³/h): 256
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 51 dB
- Integrated halogen lamps
- 2 aluminium filters



TOTAL DOS 60.1 VN

- Rustic decorative hood
- Electronic control panel
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 650
 - Max. (m³/h): 603
 - Min. (m³/h): 256
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 51 dB
- Integrated halogen lamps
- 2 aluminium filters

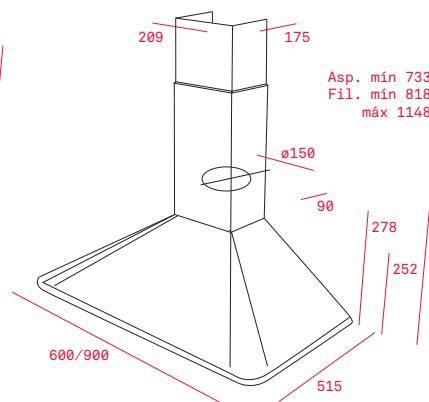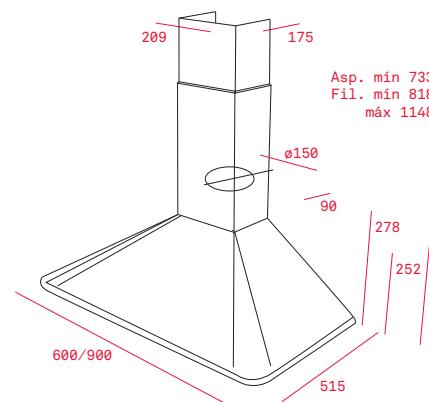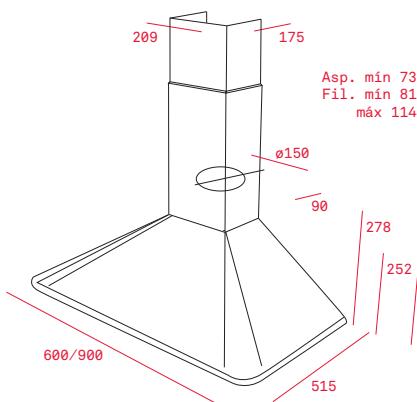

COLOR

Vanilla Brass

EXTERNAL DIMENSIONS
Height 600/900mm

COLOR

Anthracite Brass

EXTERNAL DIMENSIONS
Height 600/900mm

COLOR

Vanilla Brass

EXTERNAL DIMENSIONS
Height 600/900mm



EASY DBP 90 PRO

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet (m³/h): 650
 - Max. (m³/h): 613
 - Min. (m³/h): 318
- Noise (LwA) Max Speed 68 dB
- Noise (LwA) Min Speed 55 dB
- Integrated halogen lamps
- 3 stainless Steel-aluminum filters




EASY DBP 70 PRO

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet (m³/h): 650
 - Max. (m³/h): 613
 - Min. (m³/h): 318
- Noise (LwA) Max Speed 68 dB
- Noise (LwA) Min Speed 55 dB
- Integrated halogen lamps
- 2 stainless Steel-aluminum filters




EASY DBP 60 PRO

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds + 1 intensive
- Exhaust capacities:
 - Free Outlet (m³/h): 650
 - Max. (m³/h): 613
 - Min. (m³/h): 318
- Noise (LwA) Max Speed 68 dB
- Noise (LwA) Min Speed 55 dB
- Integrated halogen lamps
- 2 stainless Steel-aluminum filters

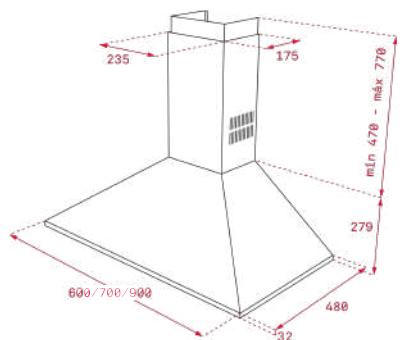


COLOR

Stainless Steel

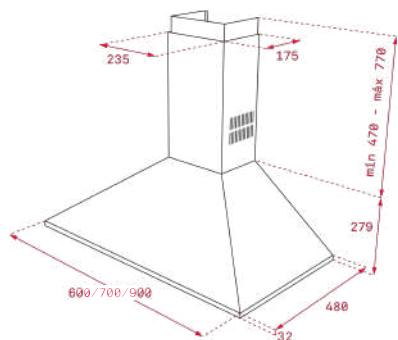

COLOR

Stainless Steel

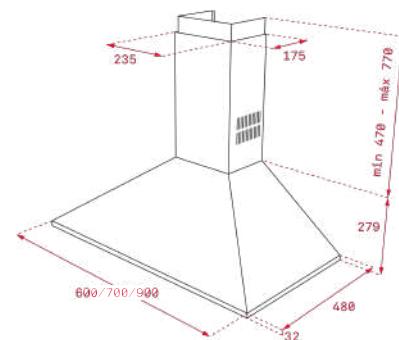

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 700 mm

EXTERNAL DIMENSIONS

Height 600 mm



EASY DBB 90 HP

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 850
 - Max. (m³/h): 780
 - Min. (m³/h): 240
- Noise (LwA) Max Speed 56 dB
- Noise (LwA) Min Speed 48 dB
- Incandescent Lamps
- 3 aluminum filters






EASY DBB 60 HP

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 850
 - Max. (m³/h): 780
 - Min. (m³/h): 240
- Noise (LwA) Max Speed 56 dB
- Noise (LwA) Min Speed 48 dB
- Incandescent Lamps
- 2 aluminum filters



EASY DBB 90

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 475
 - Max. (m³/h): 380
 - Min. (m³/h): 234
- Noise (LwA) Max Speed 60 dB
- Noise (LwA) Min Speed 44 dB
- Incandescent Lamps
- 3 aluminum filters

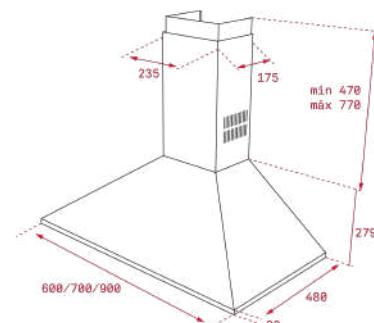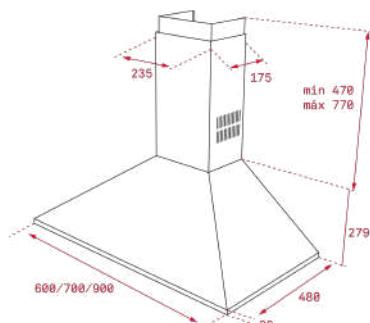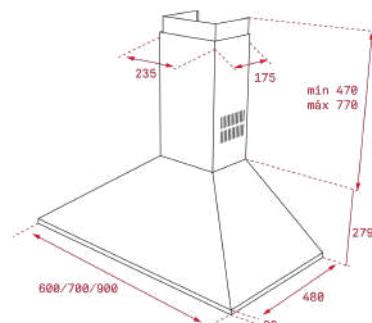

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 900 mm

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 600 mm

COLOR

Black

EXTERNAL DIMENSIONS
Height 900 mm



EASY DBB 90

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 475
 - Max. (m³/h): 380
 - Min. (m³/h): 234
- Noise (LwA) Max Speed 60 dB
- Noise (LwA) Min Speed 44 dB
- Incandescent Lamps
- 3 aluminum filters






EASY DBB 70

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 475
 - Max. (m³/h): 380
 - Min. (m³/h): 234
- Noise (LwA) Max Speed 60 dB
- Noise (LwA) Min Speed 44 dB
- Incandescent Lamps
- 2 aluminum filters



EASY DBB 70

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 475
 - Max. (m³/h): 380
 - Min. (m³/h): 234
- Noise (LwA) Max Speed 60 dB
- Noise (LwA) Min Speed 44 dB
- Incandescent Lamps
- 2 aluminum filters

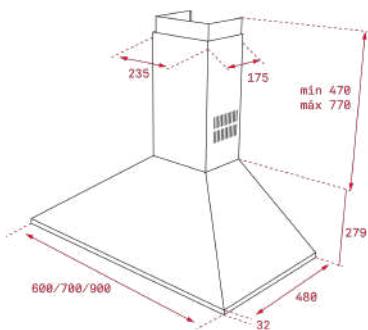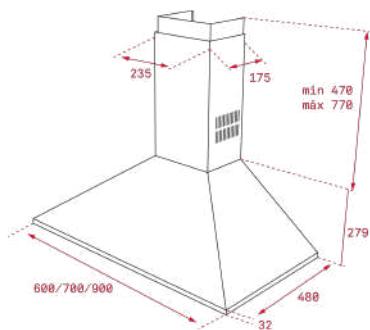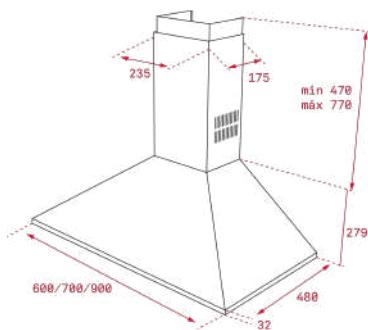

COLOR

Stainless Steel

COLOR

Stainless Steel

COLOR

Black

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height 700 mm

EXTERNAL DIMENSIONS

Height 700 mm



EASY DBB 60

- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 475
 - Max. (m³/h): 380
 - Min. (m³/h): 234
- Noise (LwA) Max Speed 60 dB
- Noise (LwA) Min Speed 44 dB
- Incandescent Lamps
- 2 aluminum filters



EASY DBB 60




- Pyramidal decorative hood
- Push buttons control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 475
 - Max. (m³/h): 380
 - Min. (m³/h): 234
- Noise (LwA) Max Speed 60 dB
- Noise (LwA) Min Speed 44 dB
- Incandescent Lamps
- 2 aluminum filters



MAESTRO CNL 9815 PLUS



- Pull-out hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic control panel
- 5+1 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 734
 - Qboost, m³/h: 730
 - Max., m³/h: 555
 - Min., m³/h: 295
- Noise (LwA) Boost Speed, dB: 70.4
- Noise (LwA) Max Speed, dB: 65.3
- Noise (LwA) Min Speed, dB: 53.1
- 1 LED bar
- 4 stainless Steel filters MMX
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel

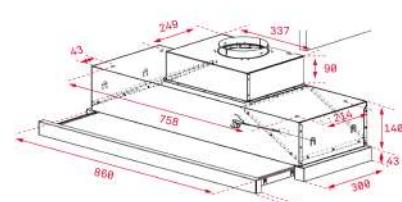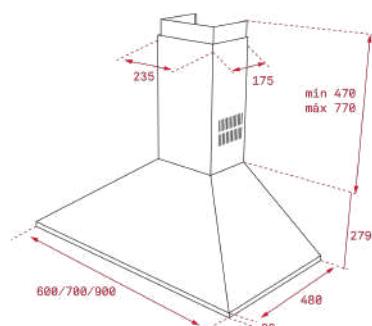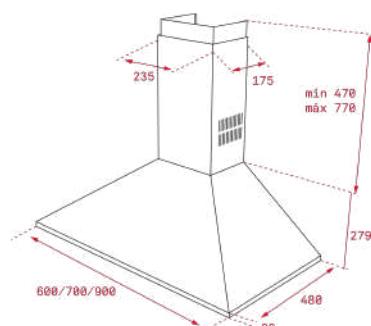

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 600 mm

COLOR

Black

EXTERNAL DIMENSIONS

Height 600 mm

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 900 mm



MAESTRO CNL 6815 PLUS



- Pull-out hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic control panel
- 5+1 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 734
 - Qboost, m³/h: 730
 - Max., m³/h: 555
 - Min., m³/h: 295
- Noise (LwA) Boost Speed, dB: 70.4
- Noise (LwA) Max Speed, dB: 65.3
- Noise (LwA) Min Speed, dB: 53.1
- 1 LED bar
- 4 stainless Steel filters MMX
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel

TOTAL CNL 6415 PLUS






- Pull-out hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic control panel
- 5+1 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 393
 - Qboost, m³/h: 385
 - Max., m³/h: 293
 - Min., m³/h: 141
- Noise (LwA) Boost Speed, dB: 69
- Noise (LwA) Max Speed, dB: 63.9
- Noise (LwA) Min Speed, dB: 51.6
- 1 LED bar
- 2 stainless Steel filters MMX
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel (SS)

TOTAL CNL 6415 PLUS



- Pull-out hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic control panel
- 5+1 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 393
 - Qboost, m³/h: 385
 - Max., m³/h: 293
 - Min., m³/h: 141
- Noise (LwA) Boost Speed, dB: 69
- Noise (LwA) Max Speed, dB: 63.9
- Noise (LwA) Min Speed, dB: 51.6
- 1 LED bar
- 2 stainless Steel filters MMX
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel

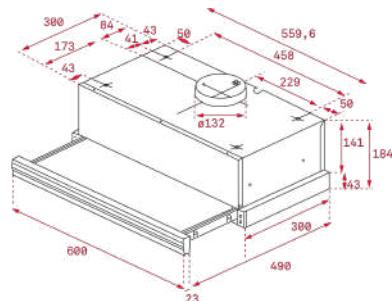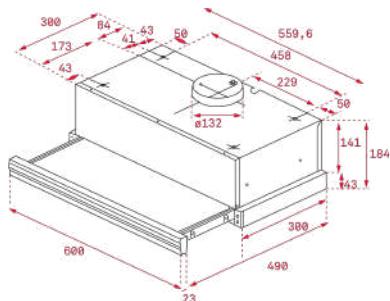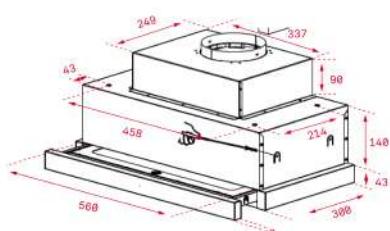

COLOR

Stainless Steel

COLOR

Stainless Steel

COLOR

White Glass

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm



TOTAL CNL 6415 PLUS



- Pull-out hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic control panel
- 5+1 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 393
- Qboost, m³/h: 385
- Max., m³/h: 293
- Min., m³/h: 141
- Noise (LwA) Boost Speed, dB: 69
- Noise (LwA) Max Speed, dB: 63,9
- Noise (LwA) Min Speed, dB: 51,6
- 1 LED bar
- 2 stainless Steel filters MMX
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel



TOTAL CNL 9610






- Pull-out hood
- Electronic control panel
- 2+1 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 745
- Qboost, m³/h: 694
- Max., m³/h: 445
- Min., m³/h: 330
- Noise (LwA) Boost Speed, dB: 70,1
- Noise (LwA) Max Speed, dB: 62,6
- Noise (LwA) Min Speed, dB: 59,8
- 3 LED lamps
- 4 aluminium filters
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel



TOTAL CNL 6415



- Pull-out hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic control panel
- 5+1 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 393
- Qboost, m³/h: 385
- Max., m³/h: 293
- Min., m³/h: 141
- Noise (LwA) Boost Speed, dB: 69
- Noise (LwA) Max Speed, dB: 63,9
- Noise (LwA) Min Speed, dB: 51,6
- 1 LED bar
- 2 stainless Steel filters MMX
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel (SS)

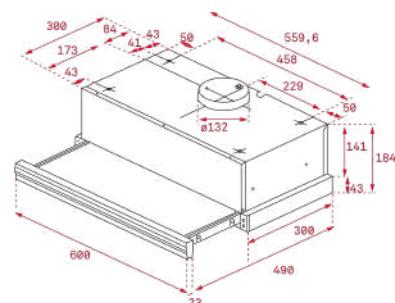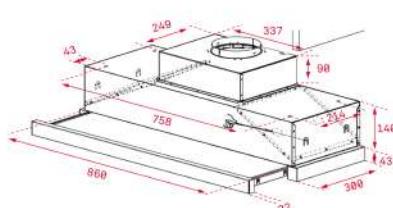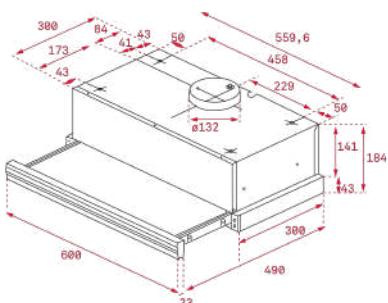

COLOR



EXTERNAL DIMENSIONS

Height 600 mm

COLOR



EXTERNAL DIMENSIONS

Height 900 mm

COLOR



EXTERNAL DIMENSIONS

Height 600 mm



TOTAL CNL 6415



- Pull-out hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic control panel
- 5+1 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 393
 - Qboost, m³/h: 385
 - Max., m³/h: 293
 - Min., m³/h: 141
- Noise (LwA) Boost Speed, dB: 69
- Noise (LwA) Max Speed, dB: 63,9
- Noise (LwA) Min Speed, dB: 51,6
- 1 LED bar
- 2 stainless Steel filters MMX
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel

TOTAL CNL 6415






- Pull-out hood
- EcoPower motor
- Energy Efficiency class: A
- Electronic control panel
- 5+1 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 393
 - Qboost, m³/h: 385
 - Max., m³/h: 293
 - Min., m³/h: 141
- Noise (LwA) Boost Speed, dB: 69
- Noise (LwA) Max Speed, dB: 63,9
- Noise (LwA) Min Speed, dB: 51,6
- 1 LED bar
- 2 stainless Steel filters MMX
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel

EASY CNL 6400



- Pull-out hood
- Electronic control panel
- 2+1 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 432
 - Qboost, m³/h: 385
 - Max., m³/h: 224
 - Min., m³/h: 161
- Noise (LwA) Boost Speed, dB: 70
- Noise (LwA) Max Speed, dB: 61
- Noise (LwA) Min Speed, dB: 56
- 2 LED lamps
- 2 stainless Steel filters
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel (SS)

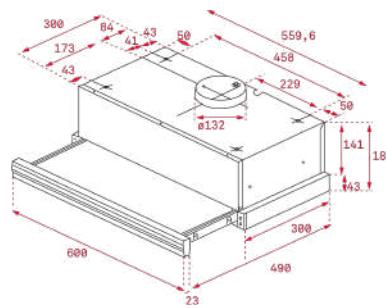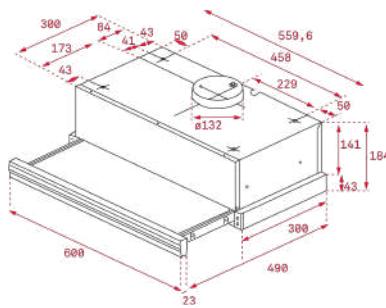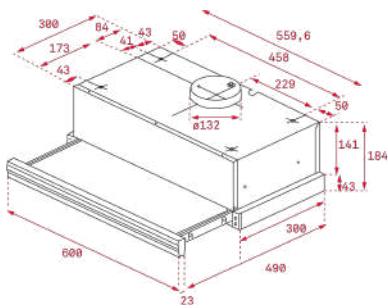

COLOR

White

COLOR

Black

COLOR

White

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm



TOTAL CNL 6400



- Pull-out hood
- Electronic control panel
- 2+1 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 432
- Qboost, m³/h: 385
- Max., m³/h: 224
- Min., m³/h: 161
- Noise (LwA) Boost Speed, dB: 70
- Noise (LwA) Max Speed, dB: 61
- Noise (LwA) Min Speed, dB: 56
- 2 LED lamps
- 2 stainless Steel filters
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel (SS)



EASY CNL 6400




- Pull-out hood
- Electronic control panel
- 2+1 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 432
- Qboost, m³/h: 385
- Max., m³/h: 224
- Min., m³/h: 161
- Noise (LwA) Boost Speed, dB: 70
- Noise (LwA) Max Speed, dB: 61
- Noise (LwA) Min Speed, dB: 56
- 2 LED lamps
- 2 stainless Steel filters
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel (SS)



EASY TL 9310




- Pull-out hood
- Mechanical control panel
- 2 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 366
- Max., m³/h: 332
- Min., m³/h: 233
- Noise (LwA) Max Speed, dB: 65
- Noise (LwA) Min Speed, dB: 56
- 2 Integrated LED lamps
- 4 aluminium filters
- Automatic Lighting
- Exchangeable Front Panel

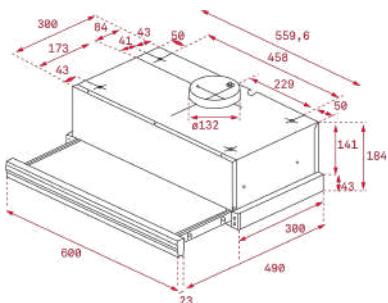

COLOR

Black


EXTERNAL DIMENSIONS
Height 600 mm

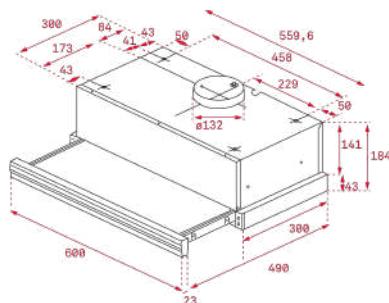

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 600 mm

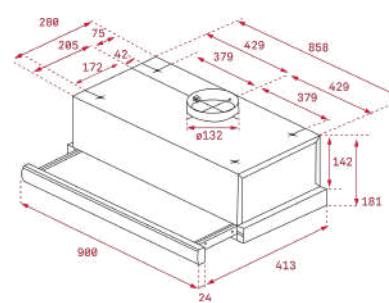

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 900 mm



EASY TL 7420



- Pull-out hood
- Mechanical control panel
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 390
 - Max., m³/h: 354
 - Min., m³/h: 177
- Noise (LwA) Max Speed, dB: 69
- Noise (LwA) Min Speed, dB: 55
- 2 Integrated LED lamps
- 2 aluminium filters
- Automatic Lighting
- Exchangeable Front Panel



EASY TL 6420






- Pull-out hood
- Mechanical control panel
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 390
 - Max., m³/h: 354
 - Min., m³/h: 177
- Noise (LwA) Max Speed, dB: 69
- Noise (LwA) Min Speed, dB: 55
- 2 Integrated LED lamps
- 2 aluminium filters
- Automatic Lighting
- Exchangeable Front Panel



EASY TL 6420

- Pull-out hood
- Mechanical control panel
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 390
 - Max., m³/h: 354
 - Min., m³/h: 177
- Noise (LwA) Max Speed, dB: 69
- Noise (LwA) Min Speed, dB: 55
- 2 Integrated halogen lamps
- 2 aluminium filters
- Automatic Lighting
- Exchangeable Front Panel

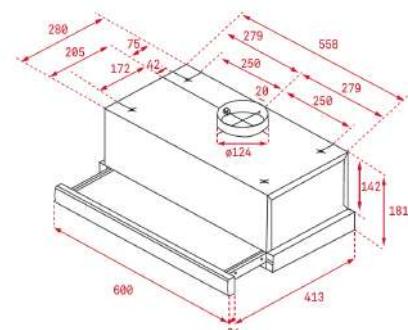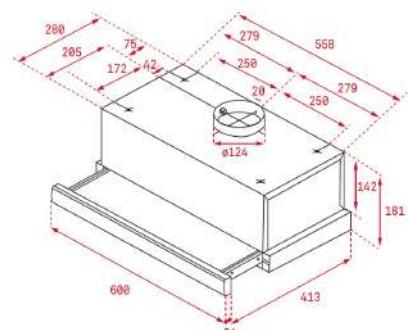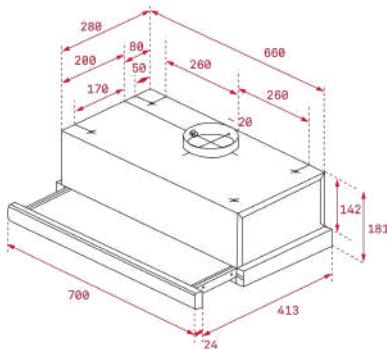

COLOR

Stainless Steel

COLOR

White

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 700 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm



EASY TL 6310



- Pull-out hood
- Mechanical control panel
- 2 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 366
 - Max., m³/h: 332
 - Min., m³/h: 233
- Noise (LwA) Max Speed, dB: 65
- Noise (LwA) Min Speed, dB: 56
- 2 Integrated LED lamps
- 4 aluminium filters
- Automatic Lighting
- Exchangeable Front Panel



EASY TL 6310






- Pull-out hood
- Mechanical control panel
- 2 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 366
 - Max., m³/h: 332
 - Min., m³/h: 233
- Noise (LwA) Max Speed, dB: 65
- Noise (LwA) Min Speed, dB: 56
- 2 Integrated LED lamps
- 4 aluminium filters
- Automatic Lighting
- Exchangeable Front Panel



EASY TL 6310



- Pull-out hood
- Mechanical control panel
- 2 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 366
 - Max., m³/h: 332
 - Min., m³/h: 233
- Noise (LwA) Max Speed, dB: 65
- Noise (LwA) Min Speed, dB: 56
- 2 Integrated LED lamps
- 4 aluminium filters
- Automatic Lighting
- Exchangeable Front Panel

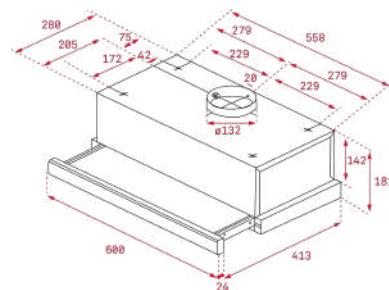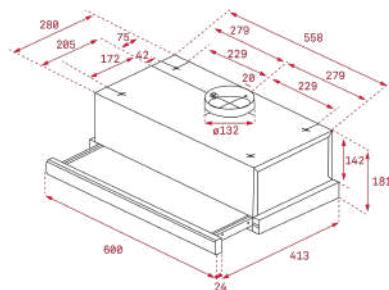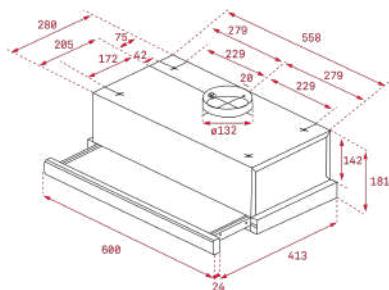

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 600 mm

COLOR

White

EXTERNAL DIMENSIONS
Height 600 mm

COLOR

Black

EXTERNAL DIMENSIONS
Height 600 mm



EASY TL1 52



- Pull-out hood
- Switch control panel
- Conventional aspiration
- 2 speeds
- Exhaust capacities:
- Free Outlet (m³/h): 366
- Max. (m³/h): 332
- Min. (m³/h): 233
- Noise (LwA) Max Speed 65 dB
- Noise (LwA) Min Speed 56 dB
- Integrated LED lamps
- 2 aluminium filters
- Exchangeable front panel



TOTAL CNL 6610




- Pull-out hood
- Electronic control panel
- 2+1 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 745
- Qboost, m³/h: 694
- Max., m³/h: 445
- Min., m³/h: 330
- Noise (LwA) Boost Speed, dB: 70.1
- Noise (LwA) Max Speed, dB: 62.6
- Noise (LwA) Min Speed, dB: 59.8
- 3 LED lamps
- 4 aluminium filters
- Reinforced Black Glass upper structure
- Automatic Lighting
- Exchangeable Front Panel
- Finger Print Proof Front Panel



MAESTRO INTEGRA 965



- Built in/free installation decorative hood
- EcoPower motor
- Energy Efficiency class: A
- Rotary knob (pop in- pop out)
- 3 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 224
- Max., m³/h: 620
- Min., m³/h: 224
- Noise (LwA) Max Speed, dB: 70
- Noise (LwA) Min Speed, dB: 48
- 2 LED lamps
- 2 aluminium filters

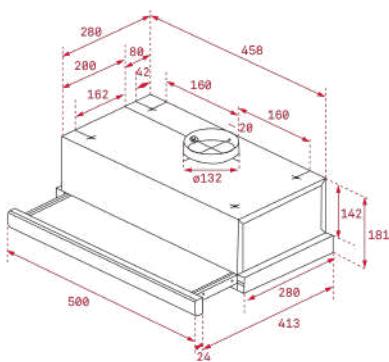

COLOR

Stainless Steel

COLOR

Stainless Steel

COLOR

Stainless Steel

EXTERNAL DIMENSIONS



Height 500 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 894 mm

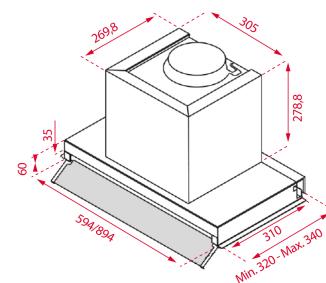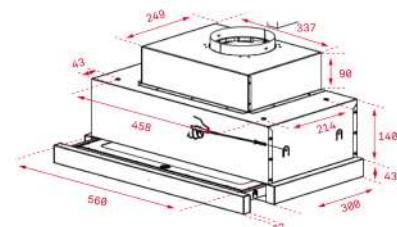



MAESTRO INTEGRA 665



- Built in/free installation decorative hood
- EcoPower motor
- Energy Efficiency class: A
- Rotary knob (pop in- pop out)
- 3 speeds
- Exhaust capacities:
- Free Outlet (m³/h): 224
- Max. m³/h: 620
- Min. m³/h: 224
- Noise (LwA) Max Speed, dB: 70
- Noise (LwA) Min Speed, dB: 48
- 2 LED lamps
- 2 aluminium filters




MAESTRO DHI 90



- Built in/free installation decorative hood
- Backlit Electronic control panel
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
- Free Outlet (m³/h): 850
- Max. (m³/h): 650
- Min. (m³/h): 295
- Noise (LwA) Max Speed 57 dB
- Noise (LwA) Min Speed 48 dB
- LED illumination
- 2 Stainless steel aluminium filters
- Stop delay timer
- Easy-clean inside panel

EASY NR1 89

- Built in decorative hood
- One motor
- Slider control panel
- Operating Pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
- Free Outlet (m³/h): 508
- Max. (m³/h): 223
- Min. (m³/h): 152
- Noise (LwA) Max Speed 65 dB
- Noise (LwA) Min Speed 63 dB
- Incandescent Lamps
- 1 metal filter

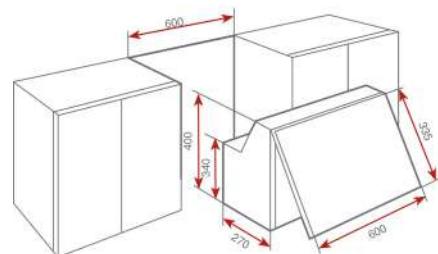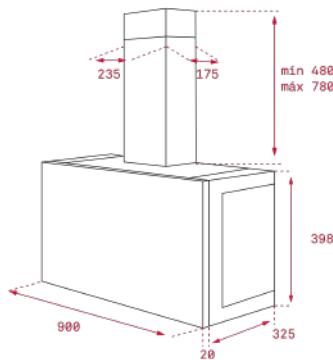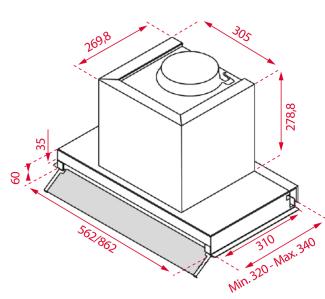

COLOR

Stainless Steel

EXTERNAL DIMENSIONS
Height 594 mm

COLOR


Stainless Steel

EXTERNAL DIMENSIONS
Height 900 mm

COLOR

White

EXTERNAL DIMENSIONS
Height 600 mm

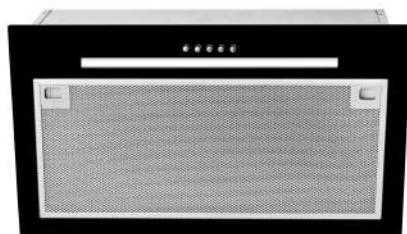

NEW

EASY XT2 8910



- Under cabinet installation
- Mechanical controls
- 3 speeds
- Exhaust capacity (*): min. 165 m³/h - max. 248 m³/h
- Sound level (*): min. 58 dBA - max. 69 dBA
- LED illumination
- Metallic filter
- Anti return valve
- Recirculation function optional (filter CIC)

EASY GFG 2






- Filter group
- Push buttons control panel
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 444
 - Max. (m³/h): 329
 - Min. (m³/h): 223
- Noise (LwA) Max Speed 63 dB
- Noise (LwA) Min Speed 53 dB
- LED illumination
- 2 aluminium filters

TOTAL GFG 2



- Filter group
- Push buttons control panel
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 444
 - Max., m³/h: 329
 - Min., m³/h: 223
- Noise (LwA) Min Speed 58 dB
- Noise (LwA) Max Speed, dB: 63
- Noise (LwA) Min Speed, dB: 53
- 1 LED bar
- 1 stainless Steel filters MMX

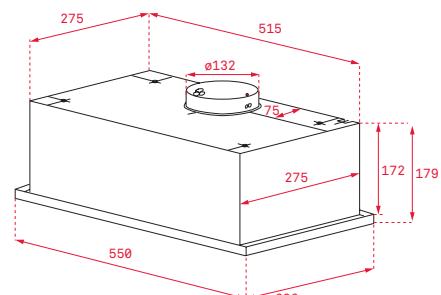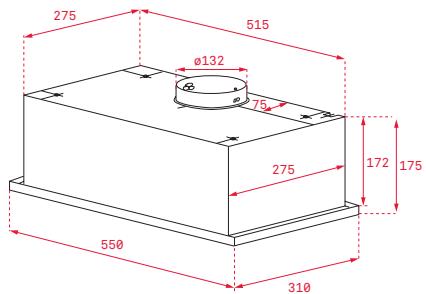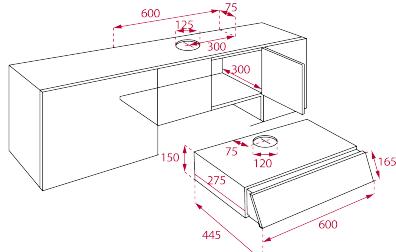

COLOR

White

COLOR

Black Glass

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 550 mm

EXTERNAL DIMENSIONS

Height 550 mm



EASY GFG 2



- Filter group
- Push buttons control panel
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 444
 - Max. (m³/h): 329
 - Min. (m³/h): 223
- Noise (LwA) Max Speed 63 dB
- Noise (LwA) Min Speed 53 dB
- LED illumination
- 2 aluminium filters




EASY GFT 800

- Filter group
- Slider control panel
- Operating pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 830
 - Max. (m³/h): 653
 - Min. (m³/h): 280
- Noise (LwA) Max Speed 66 dB
- Noise (LwA) Min Speed 48 dB
- Incandescent Lamps
- 2 aluminium filters




EASY GFH 55

- Filter group
- Push buttons control panel
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 367
 - Max. (m³/h): 329
 - Min. (m³/h): 223
- Noise (LwA) Max Speed 69 dB
- Noise (LwA) Min Speed 62 dB
- Integrated halogen lamps
- 2 aluminium filters

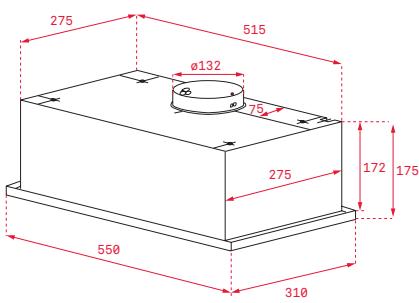


COLOR

White Glass

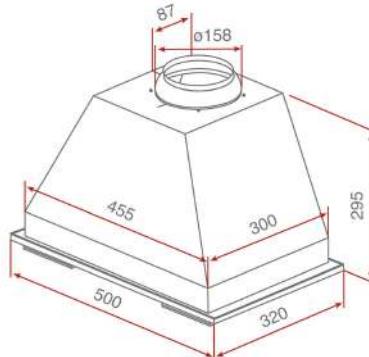

COLOR

Stainless Steel

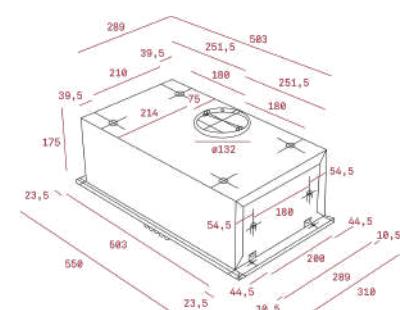

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 550 mm

EXTERNAL DIMENSIONS

Height 500 mm

EXTERNAL DIMENSIONS

Height 550 mm



EASY GFH 73

- Filter group
- Push buttons control panel
- Operating pilot light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 367
 - Max. (m³/h): 329
 - Min. (m³/h): 223
- Noise (LwA) Max Speed 69 dB
- Noise (LwA) Min Speed 62 dB
- Integrated halogen lamps
- 2 aluminium filters



EASY GFT


- Filter group
- Slider control panel
- Operating pilot Light
- Conventional aspiration
- 3 speeds
- Exhaust capacities:
 - Free Outlet (m³/h): 434
 - Max. (m³/h): 303
 - Min. (m³/h): 205
- Noise (LwA) Max Speed 64 dB
- Noise (LwA) Min Speed 50 dB
- Incandescent Lamps
- 2 aluminium filters



EASY C 9420




- Classic hood
- Push buttons control panel (SS models)
- Operating pilot light
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 422
 - Max., m³/h: 375
 - Min., m³/h: 141
- Noise (LwA) Max Speed, dB: 72
- Noise (LwA) Min Speed, dB: 60
- 2 Integrated LED lamps
- 3 aluminium filters
- Finger Print Proof Front Panel (SS)

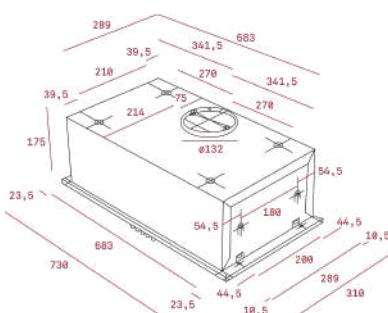


COLOR

Stainless Steel

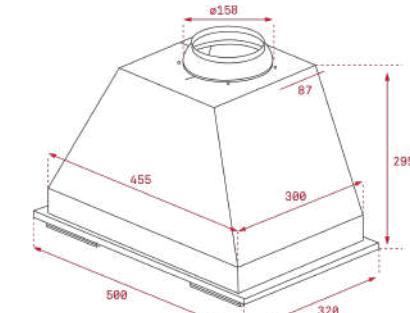

COLOR

Stainless Steel

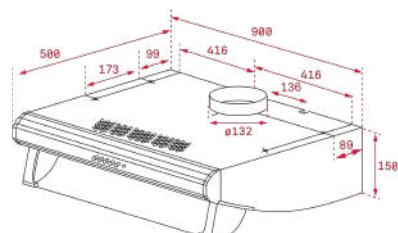

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 730 mm

EXTERNAL DIMENSIONS

Height 500 mm

EXTERNAL DIMENSIONS

Height 900 mm



EASY C 9310

- Push buttons control panel (55 models)
- Energy efficiency: E
- Operating pilot light
- 3 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 254
- Max., m³/h: 235
- Min., m³/h: 124
- Noise (LwA) Max Speed, dB: 62
- Noise (LwA) Min Speed, dB: 45
- 2 halogen lamps
- 3 aluminium filters
- Finger Print Proof Front Panel (SS)




EASY C 8310

- Push buttons control panel
- 3 speeds
- Exhaust capacities:
- Max., m³/h: 532
- Min., m³/h: 235
- Noise (LwA) Max Speed, dB: 66
- Noise (LwA) Min Speed, dB: 49
- incandescent lamps




EASY C 7310

- 3 speeds
- Exhaust capacities:
- Free Outlet, m³/h: 254
- Max., m³/h: 235
- Min., m³/h: 124
- Noise (LwA) Max Speed, dB: 72
- Noise (LwA) Min Speed, dB: 60
- 2 incandescent lamps
- aluminium filters
- Filter saturation indicator
- Finger Print Proof Front Panel (SS)

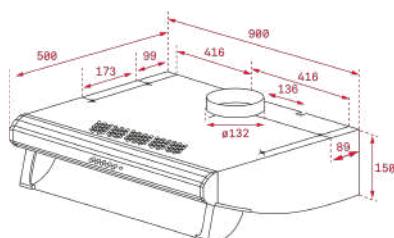


COLOR

Stainless Steel

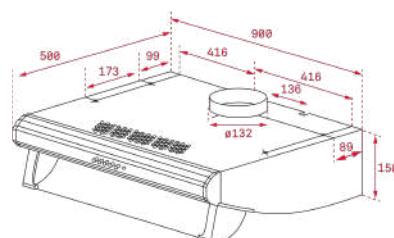

COLOR

Stainless Steel

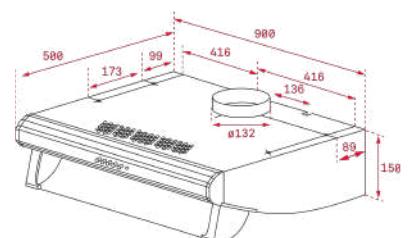

COLOR

Stainless Steel

EXTERNAL DIMENSIONS

Height 900 mm

EXTERNAL DIMENSIONS

Height mm

EXTERNAL DIMENSIONS

Height mm



EASY C 6420



- Classic hood
- Operating pilot light
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 422
 - Max., m³/h: 375
 - Min., m³/h: 141
- Noise (LwA) Max Speed, dB: 72
- Noise (LwA) Min Speed, dB: 60
- 2 Integrated LED lamps
- 3 aluminium filters

EASY C 6420






- Classic hood
- Operating pilot light
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 422
 - Max., m³/h: 375
 - Min., m³/h: 141
- Noise (LwA) Max Speed, dB: 72
- Noise (LwA) Min Speed, dB: 60
- 2 Integrated LED lamps
- 3 aluminium filters

EASY C 6420



- Classic hood
- Operating pilot light
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 422
 - Max., m³/h: 375
 - Min., m³/h: 141
- Noise (LwA) Max Speed, dB: 72
- Noise (LwA) Min Speed, dB: 60
- 2 Integrated LED lamps
- 3 aluminium filters

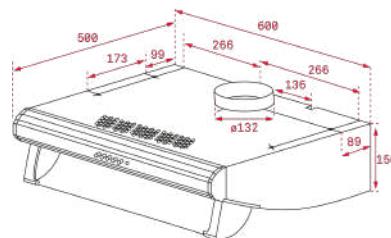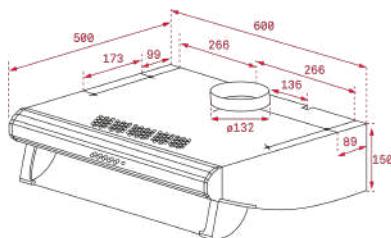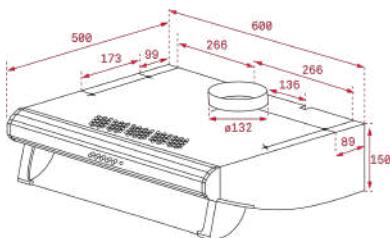

COLOR

Stainless Steel

COLOR

Black

COLOR

White

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm



EASY C 6310



- Classic hood
- Push buttons control panel (SS models)
- Operating pilot light
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 254
 - Max., m³/h: 235
 - Min., m³/h: 124
- Noise (LwA) Max Speed, dB: 62
- Noise (LwA) Min Speed, dB: 45
- 2 Integrated LED lamps
- 3 aluminium filters
- Finger Print Proof Front Panel (SS)

EASY C 6310






- Classic hood
- Operating pilot light
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 254
 - Max., m³/h: 235
 - Min., m³/h: 124
- Noise (LwA) Max Speed, dB: 62
- Noise (LwA) Min Speed, dB: 45
- 2 Integrated LED lamps
- 3 aluminium filters

EASY C 6310



- Classic hood
- Operating pilot light
- 3 speeds
- Exhaust capacities:
 - Free Outlet, m³/h: 254
 - Max., m³/h: 235
 - Min., m³/h: 124
- Noise (LwA) Max Speed, dB: 62
- Noise (LwA) Min Speed, dB: 45
- 2 Integrated LED lamps
- 3 aluminium filters

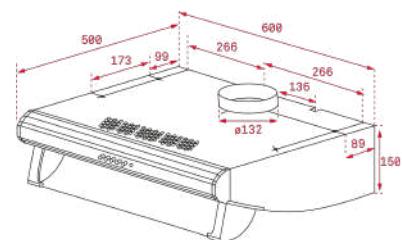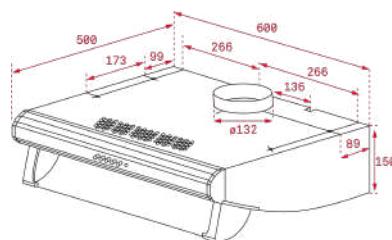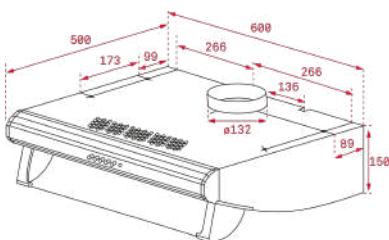

COLOR

Stainless Steel

COLOR

White

COLOR

Black

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

EXTERNAL DIMENSIONS

Height 600 mm

HOODS

| Modelo | DHT 1285 ISLAND | DPL 1185 | CC 485 ISLAND | DPL 1185 ISLAND | DH2 ISLA 1285 | DH2 1280 | DH2 985 ISLAND | DH2 980 ISLAND |
|---|--------------------|----------|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 46,7 | 49,3 | 44,7 | 49,3 | 47,8 | 140,2 | 47,8 | 140,2 |
| Energy Efficiency Class | A | A | A | A | A | D | A | D |
| Fluid Dynamic Efficiency (FDEhood) | 32,1 | 32,1 | 32,2 | 32,1 | 32,3 | 12,7 | 32,3 | 12,7 |
| Fluid Dynamic Efficiency class | A | A | A | A | A | E | A | E |
| Light Efficiency (Lehood) lux/Watt | 58,3 | 58,3 | 87,3 | 58,3 | 58,3 | 58,3 | 58,3 | 58,3 |
| Lighting Efficiency class | A | A | A | A | A | A | A | A |
| Grease Filtering Efficiency (GFEhood) % | 86,8 | 75,9 | 77,8 | 75,9 | 83,4 | 83,7 | 83,4 | 83,7 |
| Grease Filtering Efficiency class | B | C | C | C | C | C | C | C |
| Air flow (Qmin) m3/h | 315 | 331 | 305 | 331 | 311 | 295 | 311 | 295 |
| Air flow (Qmax) m3/h | 631 | 629 | 525 | 629 | 605 | 400 | 605 | 400 |
| Air flow (Qboost) m3/h | 807 | 782 | 771 | 782 | 796 | 650 | 796 | 650 |
| Noise (LwA) Min Speed (dB) | 47 | 54 | 50 | 54 | 52 | 48 | 52 | 48 |
| Noise (LwA) Max Speed (dB) | 66 | 69 | 78 | 66 | 66 | 56 | 71 | 66 |
| Noise (LwA) Boost Speed (dB) | 66 | 69 | 78 | 69 | 71 | 66 | 71 | 66 |
| Off mode Power (Po) W | - | - | - | - | - | - | - | - |
| Standby Power (Ps) W | 1 | 0,7 | 0,7 | 0,74 | 0,56 | 0,56 | 0,6 | 0,6 |
| Energy Efficiency Index (EEI) | 49,9 | 50,1 | 47,3 | 50,1 | 50,1 | 91,1 | 50,1 | 91,1 |
| Time increase actor (f) | 0,8 | 0,8 | 0,8 | 0,8 | 0,8 | 1,5 | 0,8 | 1,5 |
| Air flow at best efficiency point (Qbep) m3 / h | 329,8 | 346 | 345 | 346 | 341 | 427 | 341 | 427 |
| Air pressure at best efficiency point(Pbep) Pa | 456 | 464 | 465 | 464 | 456 | 257 | 456 | 257 |
| Electric power input at best efficiency point (Wbep) W | 130,1 | 139 | 138,2 | 139 | 133,7 | 240 | 133,7 | 240 |
| Nominal power of the lighting system (WL) W | 12 | 12 | 6 | 12 | 12 | 12 | 12 | 12 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 1200 | 1100 | 400 | 1100 | 1200 | 1200 | 900 | 900 |
| Depth (mm) | 600 | 605 | 400 | 605 | 600 | 600 | 600 | 600 |
| Height (mm) | 305 | 817-1117 | 815-1115 | 817-1117 | 817 / 1117 + 62 | 817 / 1117 + 62 | 817 / 1117 + 62 | 817 / 1117 + 62 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 280 | 280 | 280 | 280 | 280 | 230 | 280 | 230 |
| Total hood power (W) | 292 | 292 | 286 | 242 | 270 | 270 | 292 | 242 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | - | - | - | ✓ | ✓ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Number of Filters | 4 | 3 | 1 | 3 | 4 | 4 | 3 | 3 |
| Charcoal filter | - | D4C | D4C | D4C | D4C | D4C | D4C | D4C |
| Recirculation kit | ZUB 9015 | SET 1/T1 | SET 1/I1 | SET 1/T1 |

| Modelo | DG3 985 ISLAND ISLAND | DG3 ISLA 980 ISLAND | DSB 985 ISLAND | QUADRO DLV 998 | DLV 985 | QUADRO DLV 980 | DLV 685 | DVT 985 |
|---|--------------------------|------------------------|----------------|-------------------|----------|-------------------|----------|----------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 47,8 | 140,2 | 47,8 | 27,0 | 55,5 | 128 | 55,5 | 51,1 |
| Energy Efficiency Class | A | D | A | A++ | A | D | A | A |
| Fluid Dynamic Efficiency (FDEhood) | 32,3 | 12,7 | 32,3 | 38,2 | 34,5 | 13,7 | 34,5 | 32,3 |
| Fluid Dynamic Efficiency class | A | E | A | A | A | D | A | A |
| Light Efficiency (Lehood) lux/Watt | 58,3 | 58,3 | 58,3 | 55,7 | 41,7 | 69,8 | 41,7 | 69,8 |
| Lighting Efficiency class | A | A | A | A | A | A | A | A |
| Grease Filtering Efficiency (GFEhood) % | 83,4 | 83,7 | 83,4 | 75,9 | - | 75,9 | - | 75,9 |
| Grease Filtering Efficiency class | C | C | C | C | G | C | G | C |
| Air flow (Qmin) m3/h | 311 | 295 | 311 | 264 | 325 | 259 | 325 | 303 |
| Air flow (Qmax) m3/h | 605 | 400 | 605 | 626 | 614 | 423 | 614 | 599 |
| Air flow (Qboost) m3/h | 796 | 650 | 796 | 816 | 782 | 730 | 782 | 786 |
| Noise (LwA) Min Speed (dB) | 52 | 48 | 52 | 37 | 54 | 50 | 54 | 52 |
| Noise (LwA) Max Speed (dB) | 71 | 66 | 71 | 65 | 72 | 58 | 72 | 71 |
| Noise (LwA) Boost Speed (dB) | 71 | 66 | 71 | 65 | 72 | 69 | 72 | 71 |
| Off mode Power (Po) W | - | - | - | 0,3 | 0,3 | - | 0,3 | - |
| Standby Power (Ps) W | 0,6 | 0,6 | 0,6 | - | - | 0,74 | - | 0,7 |
| Energy Efficiency Index (EEI) | 50,1 | 91,1 | 50,1 | 36,4 | 50,5 | 89,6 | 50,5 | 47,9 |
| Time increase actor (f) | 0,8 | 1,5 | 0,8 | 0,6 | 0,8 | 1,5 | 0,8 | 0,8 |
| Air flow at best efficiency point (Qbep) m3 / h | 341 | 427 | 341 | 339 | 440 | 402 | 440 | 404,9 |
| Air pressure at best efficiency point(Pbep) Pa | 456 | 257 | 456 | 406 | 452 | 278 | 452 | 460 |
| Electric power input at best efficiency point (Wbep) W | 133,7 | 240 | 133,7 | 100 | 160 | 225,8 | 160 | 160,1 |
| Nominal power of the lighting system (WL) W | 12 | 12 | 12 | 7 | 12 | 6 | 12 | 6 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 900 | 900 | 900 | 900 | 900 | 900 | 600 | 900 |
| Depth (mm) | 600 | 600 | 600 | 450 | 450 | 450 | 450 | 418 |
| Height (mm) | 871 - 1171 | 871 - 1171 | 907 -1207 | 800-1200 | 800-1200 | 800-1200 | 800-1200 | 860-1160 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 280 | 230 | 280 | 165 | 280 | 230 | 280 | 280 |
| Total hood power (W) | 292 | 242 | 292 | 172 | 287 | 237 | 287 | 286 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Number of Filters | 2 | 2 | 3 | 2 | 2 | 2 | 2 | 1 |
| Charcoal filter | D4C | D4C | D4C | - | D4C | D1C | D4C | D4C |
| Recirculation kit | SET 1/T1 | SET 1/T | SET 1/T1 | - | SET 1/N1 | - | SET 1/N1 | SET 1/M1 |

HOODS

| Modelo | DVT 785 | DVT 685 | DVU 590 | DVF 97670 TBS | DVF 67670 TBS | DVN 94030 TTC | DVN 74030 TTC | DVN 64030 TTC |
|--|----------|----------|-----------|---------------|---------------|---------------|---------------|---------------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 51,1 | 51,1 | 89,0 | 35,1 | 35,1 | 60,2 | 60,2 | 60,2 |
| Energy Efficiency Class | A | A | D | A++ | A++ | C | C | C |
| Fluid Dynamic Efficiency (FDEhood) | 32,3 | 32,3 | 15,3 | 37,6 | 37,6 | 11,1 | 11,1 | 11,1 |
| Fluid Dynamic Efficiency class | A | A | D | A | A | E | E | E |
| Light Efficiency (Lehood) lux/Watt | 69,8 | 69,8 | 33 | 45 | 45 | 76,1 | 76,1 | 76,1 |
| Lighting Efficiency class | A | A | A | A | A | A | A | A |
| Grease Filtering Efficiency (GFEhood) % | 75,9 | 75,9 | 72,9 | 75,1 | 75,1 | 75,1 | 75,1 | 75,1 |
| Grease Filtering Efficiency class | C | C | D | C | C | C | C | C |
| Air flow (Qmin) m3/h | 303 | 303 | 443 | 270 | 270 | 380 | 380 | 380 |
| Air flow (Qmax) m3/h | 599 | 599 | 538 | 400 | 400 | 410 | 410 | 410 |
| Air flow (Qboost) m3/h | 786 | 786 | — | 740 | 740 | 425 | 425 | 425 |
| Noise (LwA) Min Speed (dB) | 52 | 52 | 50 | 53 | 53 | 65 | 65 | 65 |
| Noise (LwA) Max Speed (dB) | 71 | 71 | — | 70 | 70 | 67 | 67 | 67 |
| Noise (LwA) Boost Speed (dB) | 71 | 71 | — | 70 | 70 | 67 | 67 | 67 |
| Off mode Power (Po) W | — | — | — | 0,5 | 0,5 | — | — | — |
| Standby Power (Ps) W | 0,7 | 0,7 | 0,4 | — | — | 0,5 | 0,5 | 0,5 |
| Energy Efficiency Index (EEI) | 47,9 | 47,9 | 86,2 | 35,7 | 35,7 | — | — | — |
| Time increase actor (f) | 0,8 | 0,8 | 1,5 | 6 | 6 | 1,6 | 1,6 | 1,6 |
| Air flow at best efficiency point (Qbep) m3 / h | 404,9 | 404,9 | 280,8 | 4.290 | 4.290 | 246 | 246 | 246 |
| Air pressure at best efficiency point(Pbep) Pa | 460 | 460 | 258 | 464 | 464 | 163 | 163 | 163 |
| Electric power input at best efficiency point (Wbep) W | 160,1 | 160,1 | 150,8 | 1.470 | 1.470 | 101 | 101 | 101 |
| Nominal power of the lighting system (WL) W | 6 | 6 | 4 | 2,2 | 2,2 | 2 | 2 | 2 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 700 | 600 | 900 | 898 | 598 | 898 | 698 | 598 |
| Depth (mm) | 418 | 418 | 432 | 409 | 409 | 325 | 325 | 325 |
| Height (mm) | 860-1160 | 860-1160 | 1001-1391 | 912/1172 | 912/1172 | 372 | 372 | 372 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 280 | 280 | 200 | 270 | 270 | 140 | 140 | 140 |
| Total hood power (W) | 286 | 286 | 204 | 272 | 272 | — | — | — |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Number of Filters | 1 | 1 | 2 | 2 | 2 | 1 | 1 | 1 |
| Charcoal filter | D4C | D4C | D6C | D11C | D11C | D9C | D9C | D9C |
| Recirculation kit | SET 1/M1 | SET 1/M1 | — | SET D11CTP | SET D11CTP | SET D13CTP | SET D13CTP | SET D13CTP |

| Modelo | PERFECTA4 DLH 1185 T | PERFECTA4 DLH 985 T | DLH 1186 T | DPL 986 T | DLH 986 T | DLH 786 T | DLH 686 T | DU 985 |
|--|----------------------|---------------------|------------|-----------|-----------|-----------|-----------|--------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 41,0 | 41,0 | 40,7 | 42,2 | 40,7 | 40,7 | 40,7 | 46,2 |
| Energy Efficiency Class | A | A | A+ | A+ | A+ | A+ | A+ | A |
| Fluid Dynamic Efficiency (FDEhood) | 34,3 | 34,3 | 35,3 | 35,1 | 35,3 | 35,3 | 35,3 | 32,3 |
| Fluid Dynamic Efficiency class | A | A | A | A | A | A | A | A |
| Light Efficiency (Lehood) lux/Watt | 55,7 | 55,7 | 49,3 | 56,7 | 49,3 | 55,2 | 55,2 | 73,3 |
| Lighting Efficiency class | A | A | A | A | A | A | A | A |
| Grease Filtering Efficiency (GFEhood) % | 98,2 | 98,2 | 82 | 75,9 | 82 | 82 | 82 | 87,9 |
| Grease Filtering Efficiency class | A | A | C | C | C | C | C | B |
| Air flow (Qmin) m3/h | 352 | 352 | 303 | 320 | 303 | 303 | 303 | 315 |
| Air flow (Qmax) m3/h | 651 | 651 | 584 | 589 | 584 | 584 | 584 | 631 |
| Air flow (Qboost) m3/h | 760 | 760 | 701 | 722 | 701 | 701 | 701 | 807 |
| Noise (LwA) Min Speed (dB) | 54 | 54 | 53 | 54 | 53 | 53 | 53 | 56 |
| Noise (LwA) Max Speed (dB) | 72 | 72 | 72 | 69 | 72 | 72 | 72 | 72 |
| Noise (LwA) Boost Speed (dB) | 72 | 72 | 72 | 69 | 72 | 72 | 72 | 72 |
| Off mode Power (Po) W | 0,3 | 0,3 | 0,3 | 0,3 | 0,3 | 0,3 | 0,3 | - |
| Standby Power (Ps) W | - | - | - | - | - | - | - | 0,7 |
| Energy Efficiency Index (EEI) | 47,2 | 47,2 | 42,0 | 42,2 | 42,0 | 42,0 | 42,0 | 49,9 |
| Time increase actor (f) | 0,8 | 0,8 | 0,7 | 0,7 | 0,7 | 0,7 | 0,7 | 0,8 |
| Air flow at best efficiency point (Qbep) m3 / h | 364 | 364 | 385,3 | 400,6 | 385,3 | 385,3 | 385,3 | 335,2 |
| Air pressure at best efficiency point(Pbep) Pa | 417 | 417 | 469 | 467 | 469 | 469 | 469 | 445 |
| Electric power input at best efficiency point (Wbep) W | 123 | 123 | 142,2 | 148,1 | 142,2 | 142,2 | 142,2 | 128,3 |
| Nominal power of the lighting system (WL) W | 7 | 7 | 6 | 6 | 6 | 6 | 6 | 12 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 1100 | 900 | 1200 | 900 | 900 | 900 | 600 | 900 |
| Depth (mm) | 480 | 480 | 480 | 480 | 480 | 480 | 480 | 450 |
| Height (mm) | 670-1000 | 670-1000 | 670-1000 | 690-1010 | 670-1000 | 670-1000 | 670-1000 | 350 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 280 | 280 | 265 | 265 | 265 | 265 | 265 | 280 |
| Total hood power (W) | 287 | 287 | 271 | 271 | 271 | 271 | 271 | 292 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | √ | √ | √ | √ | √ | √ | √ | √ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Number of Filters | 3 | 3 | 4 | 3 | 3 | 2 | 2 | 1 |
| Charcoal filter | D4C | D4C | D1C | D4C | D1C | D1C | D1C | D4C |
| Recirculation kit | SET 1/N1 | SET 1/N1 | D1CTP | SET 1/N1 | D1CTP | D1CTP | D1CTP | 1/M |

HOODS

| Modelo | DPS 986 | DPS 786 | DSH 985 | DSH 785 | DSH 685 | DSJ 980 | DSJ 680 | DSJ 950 |
|--|----------|----------|----------|----------|----------|----------|----------|----------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 42,2 | 42,2 | 54,7 | 54,7 | 54,7 | 96,7 | 96,7 | 62,7 |
| Energy Efficiency Class | A+ | A+ | A | A | A | C | C | D |
| Fluid Dynamic Efficiency (FDEhood) | 35,1 | 35,1 | 31 | 31 | 31 | 16,4 | 16,4 | 9,5 |
| Fluid Dynamic Efficiency class | A | A | A | A | A | D | D | E |
| Light Efficiency (Lehood) lux/Watt | 56,7 | 64,7 | 55,2 | 55,2 | 55,2 | 31,7 | 35 | 31,7 |
| Lighting Efficiency class | A | A | A | A | A | A | A | A |
| Grease Filtering Efficiency (GFEhood) % | 75,9 | 75,9 | 82 | 82 | 82 | 76,1 | 76,1 | 73,4 |
| Grease Filtering Efficiency class | C | C | C | C | C | C | C | D |
| Air flow (Qmin) m3/h | 320 | 320 | 305 | 305 | 305 | 268 | 268 | 235 |
| Air flow (Qmax) m3/h | 589 | 589 | 586 | 586 | 586 | 614 | 614 | 433 |
| Air flow (Qboost) m3/h | 722 | 722 | 735 | 735 | 735 | - | - | - |
| Noise (LwA) Min Speed (dB) | 54 | 54 | 54 | 54 | 54 | 48 | 48 | 43 |
| Noise (LwA) Max Speed (dB) | 69 | 69 | 72 | 72 | 72 | - | - | - |
| Noise (LwA) Boost Speed (dB) | 69 | 69 | 72 | 72 | 72 | - | - | - |
| Off mode Power (Po) W | 0,3 | 0,3 | 0,3 | 0,3 | 0,3 | - | - | - |
| Standby Power (Ps) W | - | - | - | - | - | - | - | - |
| Energy Efficiency Index (EEI) | 42,2 | 42,2 | 53,2 | 53,2 | 53,2 | 81,5 | 81,5 | 88,8 |
| Time increase actor (f) | 0,7 | 0,7 | 0,9 | 0,9 | 0,9 | 1,4 | 1,4 | 1,7 |
| Air flow at best efficiency point (Qbep) m3 / h | 400,6 | 400,6 | 388 | 388 | 388 | 363,1 | 363,1 | 224,6 |
| Air pressure at best efficiency point(Pbep) Pa | 467 | 467 | 440 | 440 | 440 | 301 | 301 | 148 |
| Electric power input at best efficiency point (Wbep) W | 148,1 | 148,1 | 153,1 | 153,1 | 153,1 | 185 | 185 | 97,5 |
| Nominal power of the lighting system (WL) W | 6 | 6 | 6 | 6 | 6 | 3 | 3 | 3 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 900 | 900 | 900 | 900 | 600 | 900 | 600 | 900 |
| Depth (mm) | 480 | 480 | 480 | 480 | 480 | 480 | 480 | 480 |
| Height (mm) | 690-1010 | 690-1010 | 670-1000 | 670-1000 | 670-1000 | 670-1000 | 670-1000 | 670-1000 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 265 | 265 | 280 | 280 | 280 | 220 | 220 | 110 |
| Total hood power (W) | 271 | 271 | 286 | 286 | 286 | 223 | 223 | 113 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Number of Filters | 3 | 2 | 3 | 2 | 2 | 3 | 2 | 3 |
| Charcoal filter | D4C | D4C | D4C | D4C | D4C | D1C | D1C | D1C |
| Recirculation kit | SET 1/N1 | D1CTP | D1CTP | D1CTP |

| Modelo | DSJ 750 | DSJ 650 | DQ2 985 | DG 985 | DG 785 | NC 985 | NC 785 | DG 650 |
|--|----------|----------|----------|-----------|-----------|----------|----------|----------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 62,7 | 62,7 | 44,0 | 56,7 | 56,7 | 56,7 | 56,7 | 87,2 |
| Energy Efficiency Class | D | D | A | A | A | A | A | E |
| Fluid Dynamic Efficiency (FDEhood) | 9,5 | 9,5 | 32,3 | 30,5 | 30,5 | 30,5 | 30,5 | 6,1 |
| Fluid Dynamic Efficiency class | E | E | A | A | A | A | A | F |
| Light Efficiency (Lehood) lux/Watt | 35 | 35 | 64,4 | 65,2 | 77,2 | 65,2 | 77,2 | 5,6 |
| Lighting Efficiency class | A | A | A | A | A | A | A | F |
| Grease Filtering Efficiency (GFEhood) % | 73,4 | 73,4 | 86,5 | 83,7 | 83,7 | 83,7 | 83,7 | 73,4 |
| Grease Filtering Efficiency class | D | D | B | C | C | C | C | D |
| Air flow (Qmin) m3/h | 235 | 235 | 315 | 315 | 315 | 315 | 315 | 234 |
| Air flow (Qmax) m3/h | 433 | 433 | 631 | 631 | 631 | 631 | 631 | 380 |
| Air flow (Qboost) m3/h | - | - | 807 | 807 | 807 | 807 | 807 | - |
| Noise (LwA) Min Speed (dB) | 43 | 43 | 56 | 56 | 56 | 56 | 56 | 49 |
| Noise (LwA) Max Speed (dB) | - | - | 72 | 72 | 72 | 72 | 72 | - |
| Noise (LwA) Boost Speed (dB) | - | - | 72 | 72 | 72 | 72 | 72 | - |
| Off mode Power (Po) W | - | - | - | - | - | - | - | - |
| Standby Power (Ps) W | - | - | 0,6 | 0,6 | 0,6 | 0,6 | 0,6 | - |
| Energy Efficiency Index (EEI) | 88,8 | 88,8 | 48,5 | 53,3 | 53,3 | 53,3 | 53,3 | 101,5 |
| Time increase actor (f) | 1,7 | 1,7 | 0,8 | 0,9 | 0,9 | 0,9 | 0,9 | 1,8 |
| Air flow at best efficiency point (Qbep) m3 / h | 224,6 | 224,6 | 335,2 | 403,9 | 403,9 | 403,9 | 403,9 | 196 |
| Air pressure at best efficiency point(Pbep) Pa | 148 | 148 | 445 | 434 | 434 | 434 | 434 | 99 |
| Electric power input at best efficiency point (Wbep) W | 97,5 | 97,5 | 128,3 | 159,4 | 159,4 | 159,4 | 159,4 | 88,3 |
| Nominal power of the lighting system (WL) W | 3 | 3 | 9 | 6 | 6 | 6 | 6 | 40 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 900 | 900 | 895 | 900 | 700 | 900 | 700 | 600 |
| Depth (mm) | 480 | 480 | 895 | 500 | 500 | 500 | 500 | 500 |
| Height (mm) | 670-1000 | 670-1000 | 680-1010 | 667 - 997 | 667 - 997 | 674-1004 | 674-1004 | 667-997 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 110 | 110 | 280 | 280 | 280 | 280 | 280 | 105 |
| Total hood power (W) | 113 | 113 | 289 | 286 | 286 | 286 | 286 | 145 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Number of Filters | 2 | 2 | 2 | 1 | 1 | 1 | 1 | 1 |
| Charcoal filter | D1C | D1C | D4C | D4C | D4C | D4C | D4C | D4C |
| Recirculation kit | D1CTP | D1CTP | SET 1/L | SET 1/N1 | SET 1/N1 | SET 1/N1 | SET 1/N1 | SET 1/N1 |

HOODS

| Modelo | DSS 985 | DSS 785 | DM 975 | DM 775 | DM 675 | DMR 975 | DOS 90.1 AT | DOS 90.1 VN |
|--|----------|----------|------------|------------|------------|------------|-------------|-------------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 54,6 | 52,4 | 43,6 | 43,6 | 43,6 | 42,1 | 68,4 | 68,4 |
| Energy Efficiency Class | A | A | A | A | A | A | B | B |
| Fluid Dynamic Efficiency (FDEhood) | 33 | 33 | 30,5 | 30,5 | 30,5 | 30,5 | 238 | 238 |
| Fluid Dynamic Efficiency class | A | A | A | A | A | A | B | B |
| Light Efficiency (Lehood) lux/Watt | 41,7 | 43,3 | 9,4 | 9,4 | 9,4 | 9,4 | 201 | 201 |
| Lighting Efficiency class | A | A | E | E | E | E | B | B |
| Grease Filtering Efficiency (GFEhood) % | 82,7 | 82,7 | 83,7 | 83,7 | 83,7 | 83,7 | 660 | 660 |
| Grease Filtering Efficiency class | C | C | C | C | C | C | D | D |
| Air flow (Qmin) m3/h | 303 | 303 | 283 | 283 | 283 | 283 | 256,0 | 256,0 |
| Air flow (Qmax) m3/h | 597 | 597 | 603 | 603 | 603 | 603 | 603,0 | 603,0 |
| Air flow (Qboost) m3/h | 760 | 760 | — | — | — | — | — | — |
| Noise (LwA) Min Speed (dB) | 54 | 54 | 53 | 53 | 53 | 53 | 51 | 51 |
| Noise (LwA) Max Speed (dB) | 73 | 73 | — | — | — | — | — | — |
| Noise (LwA) Boost Speed (dB) | 73 | 73 | — | — | — | — | — | — |
| Off mode Power (Po) W | 0,3 | 0,3 | — | — | — | — | — | — |
| Standby Power (Ps) W | — | — | — | — | — | — | — | — |
| Energy Efficiency Index (EEI) | 50,4 | 49,2 | 53,5 | 53,5 | 53,5 | 53,5 | 64,3 | 64,3 |
| Time increase actor (f) | 0,8 | 0,8 | 0,9 | 0,9 | 0,9 | 0,9 | 11 | 11 |
| Air flow at best efficiency point (Qbep) m3 / h | 418 | 418 | 316,2 | 316,2 | 316,2 | 316,2 | 2.880 | 2.880 |
| Air pressure at best efficiency point(Pbep) Pa | 446 | 446 | 383 | 383 | 383 | 383 | 4.740 | 4.740 |
| Electric power input at best efficiency point (Wbep) W | 157 | 157 | 110,4 | 110,4 | 110,4 | 110,4 | 1.595 | 1.595 |
| Nominal power of the lighting system (WL) W | 12 | 9 | 10 | 10 | 10 | 10 | 6,0 | 6,0 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 900 | 700 | 900 | 700 | 600 | 900 | 600/900 | 600/900 |
| Depth (mm) | 480 | 480 | 500 | 500 | 500 | 500 | 500 | 500 |
| Height (mm) | 700-1100 | 700-1100 | 735 - 1095 | 735 - 1095 | 735 - 1095 | 735 - 1095 | 733-1148 | 733-1148 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 280 | 280 | 270 | 270 | 270 | 270 | 250 | 250 |
| Total hood power (W) | 292 | 289 | 280 | 280 | 280 | 280 | 290 | 290 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Number of Filters | 3 | 2 | 3 | 2 | 2 | 3 | 2 | 2 |
| Charcoal filter | D4C | D4C | D4C | D4C | D4C | D4C | D5C | D5C |
| Recirculation kit | SET 1/N1 | SET 1/N1 | SET 1/M1 | SET 1/M1 | SET 1/M1 | SET 1/M1 | SET 4/D | SET 4/D |

| Modelo | DOS 60.1 AT | DOS 60.1 VN | DBP 90 PRO | DBP 70 PRO | DBP 60 PRO | DBB 90 HP | DBB 60 HP | DBB 90 |
|--|-------------|-------------|------------|------------|------------|-----------|-----------|----------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 68.4 | 68.4 | 104,2 | 104,2 | 104,2 | 185,9 | 185,9 | 62,3 |
| Energy Efficiency Class | B | B | D | D | D | D | D | D |
| Fluid Dynamic Efficiency (FDEhood) | 238 | 238 | 12,9 | 12,9 | 12,9 | 14,7 | 14,7 | 6,9 |
| Fluid Dynamic Efficiency class | B | B | E | E | E | D | D | F |
| Light Efficiency (Lehood) lux/Watt | 201 | 201 | 5,9 | 5,9 | 5,9 | 5,9 | 5,9 | 5,9 |
| Lighting Efficiency class | B | B | F | F | F | F | F | F |
| Grease Filtering Efficiency (GFEhood) % | 660 | 660 | 83,7 | 83,7 | 83,7 | 76,1 | 76,1 | 73,4 |
| Grease Filtering Efficiency class | D | D | C | C | C | C | C | D |
| Air flow (Qmin) m3/h | 256,0 | 256,0 | 318 | 318 | 318 | 295 | 295 | 234 |
| Air flow (Qmax) m3/h | 603,0 | 603,0 | 613 | 613 | 613 | 650 | 650 | 380 |
| Air flow (Qboost) m3/h | - | - | - | - | - | - | - | - |
| Noise (LwA) Min Speed (dB) | 51 | 51 | 55 | 55 | 55 | 48 | 48 | 44 |
| Noise (LwA) Max Speed (dB) | - | - | - | - | - | - | - | - |
| Noise (LwA) Boost Speed (dB) | - | - | - | - | - | - | - | - |
| Off mode Power (Po) W | - | - | - | - | - | - | - | - |
| Standby Power (Ps) W | - | - | - | - | - | - | - | - |
| Energy Efficiency Index (EEI) | 64,3 | 64,3 | 88,2 | 88,2 | 88,2 | 99,2 | 99,2 | 93,3 |
| Time increase actor (f) | 11 | 11 | 1,5 | 1,5 | 1,5 | 1,5 | 1,5 | 1,8 |
| Air flow at best efficiency point (Qbep) m3 / h | 2.880 | 2.880 | 385,1 | 385,1 | 385,1 | 473,9 | 473,9 | 210,6 |
| Air pressure at best efficiency point(Pbep) Pa | 4.740 | 4.740 | 214 | 214 | 214 | 260 | 260 | 99 |
| Electric power input at best efficiency point (Wbep) W | 1.595 | 1.595 | 177 | 177 | 177 | 232,9 | 232,9 | 83,7 |
| Nominal power of the lighting system (WL) W | 6,0 | 6,0 | 10 | 10 | 10 | 80 | 80 | 10 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 600/900 | 600/900 | 900 | 700 | 600 | 900 | 600 | 900 |
| Depth (mm) | 500 | 500 | 480 | 480 | 480 | 480 | 480 | 480 |
| Height (mm) | 733-1148 | 733-1148 | 749-1049 | 749-1049 | 749-1049 | 749-1049 | 749-1049 | 749-1049 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 250 | 250 | 180 | 180 | 180 | 230 | 230 | 105 |
| Total hood power (W) | 290 | 290 | 190 | 190 | 190 | 310 | 310 | 115 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 150 | 150 | 150 | 150 |
| Number of Filters | 2 | 2 | 3 | 2 | 2 | 3 | 2 | 3 |
| Charcoal filter | D5C | D5C | D4C | D4C | D4C | D4C | D4C | D4C |
| Recirculation kit | SET 4/D | SET 4/D | SET 1/M1 | SET 1/M1 | SET 1/M1 | SET 1/M1 | SET 1/M1 | SET 1/M1 |

HOODS

| Modelo | DBB 70 | DBB 60 | CNL 9815 PLUS | CNL 6815 PLUS | CNL 6415 PLUS | CNL 9610 | CNL 6415 | CNL 6400 |
|--|----------|----------|---------------|---------------|---------------|----------|----------|----------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 62,3 | 62,3 | 56,6 | 54,5 | 30,3 | 107,0 | 25,9 | 116,5 |
| Energy Efficiency Class | D | D | A | A | A | C | A | D |
| Fluid Dynamic Efficiency (FDEhood) | 6,9 | 6,9 | 33,1 | 33,1 | 26,7 | 17,2 | 26,7 | 8,5 |
| Fluid Dynamic Efficiency class | F | F | A | A | B | D | B | E |
| Light Efficiency (Lehood) lux/Watt | 5,9 | 5,9 | 41,7 | 43,3 | 43,3 | 33,3 | 42,7 | 28,3 |
| Lighting Efficiency class | F | F | A | A | A | A | A | A |
| Grease Filtering Efficiency (GFEhood) % | 73,4 | 73,4 | 84 | 84 | 84 | 72,8 | 74,6 | 74,6 |
| Grease Filtering Efficiency class | D | D | C | C | C | D | D | D |
| Air flow (Qmin) m3/h | 234 | 234 | 295 | 295 | 141 | 330 | 226 | 185 |
| Air flow (Qmax) m3/h | 380 | 380 | 555 | 555 | 293 | 445 | 312 | 234 |
| Air flow (Qboost) m3/h | - | - | 730 | 730 | 385 | 694 | 385 | 358 |
| Noise (LwA) Min Speed (dB) | 44 | 44 | 53 | 53 | 52 | 60 | 57 | 56 |
| Noise (LwA) Max Speed (dB) | - | - | 70 | 70 | 69 | 70 | 69 | 70 |
| Noise (LwA) Boost Speed (dB) | - | - | 70 | 70 | 69 | 70 | 69 | 70 |
| Off mode Power (Po) W | - | - | - | - | - | - | - | - |
| Standby Power (Ps) W | - | - | - | - | - | - | - | - |
| Energy Efficiency Index (EEI) | 93,3 | 93,3 | 50,5 | 49,3 | 54,1 | 82,7 | 49,1 | 98,6 |
| Time increase actor (f) | 1,8 | 1,8 | 0,8 | 0,8 | 1 | 1,4 | 1 | 1,7 |
| Air flow at best efficiency point (Qbep) m3 / h | 210,6 | 210,6 | 420 | 420 | 237 | 433 | 237 | 216 |
| Air pressure at best efficiency point(Pbep) Pa | 99 | 99 | 465 | 465 | 264 | 290 | 264 | 211 |
| Electric power input at best efficiency point (Wbep) W | 83,7 | 83,7 | 164 | 164 | 65 | 203 | 65 | 183 |
| Nominal power of the lighting system (WL) W | 10 | 10 | 12 | 9 | 9 | 5 | 3 | 4 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 700 | 600 | 900 | 600 | 600 | 900 | 600 | 600 |
| Depth (mm) | 480 | 480 | 300/490 | 300/490 | 300/490 | 300/490 | 300/490 | 300/490 |
| Height (mm) | 749-1049 | 749-1049 | 274 | 274 | 184 | 274 | 184 | 184 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 105 | 105 | 265 | 265 | 110 | 230 | 110 | 180 |
| Total hood power (W) | 115 | 115 | 277 | 274 | 119 | 235 | 113 | 184 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ø Outlet (mm) | 150 | 150 | 150 | 150 | 120 | 150 | 120 | 120 |
| Number of Filters | 2 | 2 | 4 | 2 | 2 | 4 | 2 | 2 |
| Charcoal filter | D4C | D4C | D1C | D1C | CNL 1C | D4C | CNL 1C | C1C |
| Recirculation kit | SET 1/M1 | SET 1/M1 | - | - | - | - | - | - |

| Modelo | TL 9310 | TL 7420 | TL 6420 | TL 6310 | TL152 | CNL 6610 | INTEGRA 965 | INTEGRA 665 |
|--|---------|---------|---------|---------|-------|----------|-------------|-------------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 71,2 | 100,0 | 100,0 | 71,2 | 71,2 | 105,9 | 47,8 | 47,8 |
| Energy Efficiency Class | D | D | D | D | D | C | A | A |
| Fluid Dynamic Efficiency (FDEhood) | 10,9 | 9 | 9 | 10,9 | 10,9 | 17,2 | 31,6 | 31,6 |
| Fluid Dynamic Efficiency class | E | E | E | E | E | D | A | A |
| Light Efficiency (Lehood) lux/Watt | 4,6 | 4,9 | 4,9 | 4,9 | 5,3 | 42,7 | 29 | 29 |
| Lighting Efficiency class | F | F | F | F | F | A | A | A |
| Grease Filtering Efficiency (GFEhood) % | 69,3 | 69,3 | 69,3 | 69,3 | 69,3 | 72,8 | 76 | 76 |
| Grease Filtering Efficiency class | D | D | D | D | D | D | C | C |
| Air flow (Qmin) m3/h | 239 | 181 | 181 | 239 | 239 | 330 | 224 | 224 |
| Air flow (Qmax) m3/h | 339 | 350 | 350 | 339 | 339 | 445 | 625 | 625 |
| Air flow (Qboost) m3/h | - | - | - | - | - | 694 | - | - |
| Noise (LwA) Min Speed (dB) | 56 | 55 | 55 | 56 | 56 | 60 | 46 | 46 |
| Noise (LwA) Max Speed (dB) | - | - | - | - | - | 70 | - | - |
| Noise (LwA) Boost Speed (dB) | - | - | - | - | - | 70 | - | - |
| Off mode Power (Po) W | - | - | - | - | - | - | - | - |
| Standby Power (Ps) W | - | - | - | - | - | - | - | - |
| Energy Efficiency Index (EEI) | 88,1 | 97,3 | 97,3 | 88,1 | 88,1 | 82,4 | 52,0 | 52,0 |
| Time increase actor (f) | 1,6 | 1,7 | 1,7 | 1,6 | 1,6 | 1,4 | 0,9 | 0,9 |
| Air flow at best efficiency point (Qbep) m3 / h | 225 | 216 | 216 | 225 | 225 | 433 | 352 | 352 |
| Air pressure at best efficiency point(Pbep) Pa | 187 | 219 | 219 | 187 | 187 | 290 | 434 | 434 |
| Electric power input at best efficiency point (Wbep) W | 107 | 147 | 147 | 107 | 107 | 203 | 134,5 | 134,5 |
| Nominal power of the lighting system (WL) W | 12 | 12 | 12 | 12 | 12 | 3 | 5 | 5 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 900 | 700 | 600 | 600 | 500 | 600 | 894 | 594 |
| Depth (mm) | 288/413 | 288/413 | 288/413 | 288/413 | 413 | 300/490 | 310 | 310 |
| Height (mm) | 184 | 184 | 184 | 184 | 181 | 274 | 339 | 339 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 130 | 180 | 180 | 130 | 130 | 230 | 260 | 260 |
| Total hood power (W) | 142 | 192 | 192 | 142 | 142 | 233 | 265 | 265 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Ø Outlet (mm) | 120 | 120 | 120 | 120 | 120 | 150 | 150 | 150 |
| Number of Filters | 4 | 2 | 2 | 2 | 2 | 2 | 2 | 1 |
| Charcoal filter | C3C | C1C | C1C | C3C | C3C | D4C | D9C | D9C |
| Recirculation kit | - | - | - | - | - | - | - | - |

HOODS

| Modelo | DHI 90 | NR1 89 | XT2 8910 | GFG 2 | GFT 800 | GFH 55 | GFH 73 | GFT |
|--|--------|--------|----------|-------|---------|--------|--------|-------|
| PRODUCT FICHE | | | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 130,2 | 122,1 | 66,7 | 68,8 | 134,1 | 67,9 | 67,9 | 69,4 |
| Energy Efficiency Class | D | E | D | D | D | D | D | D |
| Fluid Dynamic Efficiency (FDEhood) | 13,7 | 8,2 | 9,3 | 10,7 | 13,5 | 10,5 | 10,5 | 8,9 |
| Fluid Dynamic Efficiency class | D | E | E | E | D | E | E | E |
| Light Efficiency (Lehood) lux/Watt | 75 | 1 | 16,1 | 16,4 | 9 | 33,8 | 33,8 | 9 |
| Lighting Efficiency class | A | G | C | C | E | A | A | E |
| Grease Filtering Efficiency (GFEhood) % | 83,7 | 51,9 | 65,1 | 85,7 | 85,7 | 77,6 | 77,6 | 85,7 |
| Grease Filtering Efficiency class | C | F | D | B | B | C | C | B |
| Air flow (Qmin) m3/h | 295 | 152 | 160 | 240 | 280 | 296 | 296 | 203 |
| Air flow (Qmax) m3/h | 400 | 223 | 245 | 341 | 653 | 337 | 337 | 406 |
| Air flow (Qboost) m3/h | 650 | — | — | — | — | — | — | — |
| Noise (LwA) Min Speed (dB) | 48 | 63 | 58 | 53 | 48 | 62 | 62 | 50 |
| Noise (LwA) Max Speed (dB) | 68 | — | — | — | — | — | — | — |
| Noise (LwA) Boost Speed (dB) | 68 | — | — | — | — | — | — | — |
| Off mode Power (Po) W | — | — | — | — | — | — | — | — |
| Standby Power (Ps) W | 1 | — | — | — | — | — | — | — |
| Energy Efficiency Index (EEI) | 90,2 | 105,7 | 89,9 | 86,6 | 90,7 | 86,3 | 86,3 | 91,8 |
| Time increase actor (f) | 1,5 | 1,7 | 1,7 | 1,6 | 1,5 | 1,6 | 1,6 | 1,7 |
| Air flow at best efficiency point (Qbep) m3 / h | 402 | 163,2 | 145 | 232,5 | 427 | 226,8 | 226,8 | 218,1 |
| Air pressure at best efficiency point(Pbep) Pa | 278 | 184 | 240 | 184 | 260 | 185 | 185 | 143 |
| Electric power input at best efficiency point (Wbep) W | 225,8 | 102,3 | 104 | 111,5 | 229 | 111,3 | 111,3 | 97,7 |
| Nominal power of the lighting system (WL) W | 9 | 80 | 3 | 5 | 12 | 4 | 4 | 12 |
| EXTERNAL DIMENSIONS | | | | | | | | |
| Width (mm) | 900 | 600 | 600 | 550 | 500 | 550 | 730 | 500 |
| Depth (mm) | 345 | 270 | 308/340 | 310 | 320 | 310 | 310 | 320 |
| Height (mm) | 445 | 400 | 190/150 | 178 | 295 | 175 | 175 | 295 |
| ELECTRICAL FEATURES | | | | | | | | |
| Motor power (W) | 230 | 125 | 120 | 130 | 230 | 130 | 130 | 110 |
| Total hood power (W) | 239 | 205 | 123 | 135 | 242 | 134 | 134 | 122 |
| TECHNICAL DATA | | | | | | | | |
| Anti Return Valve | ✓ | — | ✓ | ✓ | — | ✓ | ✓ | — |
| Ø Outlet (mm) | 150 | 120 | 125 | 120 | 120 | 120 | 120 | 120 |
| Number of Filters | 2 | 1 | 1 | 1 | 1 | 2 | 2 | 1 |
| Charcoal filter | D4C | C5C | 1012DJ | C3C | D4C | C3C | C3C | D4C |
| Recirculation kit | SET 1S | — | — | — | — | — | — | — |

| Modelo | C 9420 | C 9310 | C 8310 | C 7310 | C 6420 | C 6310 |
|--|--------|--------|--------|--------|--------|--------|
| PRODUCT FICHE | | | | | | |
| Annual energy consumption AEC kWh/ annum (kWh) | 103,1 | 67,1 | 130,9 | 130,9 | 103,1 | 67,1 |
| Energy Efficiency Class | D | D | E | E | D | D |
| Fluid Dynamic Efficiency (FDEhood) | 8,9 | 8,1 | 5,3 | 5,3 | 8,9 | 8,1 |
| Fluid Dynamic Efficiency class | E | E | F | F | E | E |
| Light Efficiency (Lehood) lux/Watt | 4,8 | 4,5 | 0,8 | 0,8 | 4,8 | 4,8 |
| Lighting Efficiency class | F | F | G | G | F | F |
| Grease Filtering Efficiency (GFEhood) % | 72,8 | 72,8 | 72,8 | 72,8 | 72,8 | 72,8 |
| Grease Filtering Efficiency class | D | D | D | D | D | D |
| Air flow (Qmin) m3/h | 187 | 115 | 124 | 124 | 187 | 115 |
| Air flow (Qmax) m3/h | 353 | 218 | 235 | 235 | 353 | 235 |
| Air flow (Qboost) m3/h | – | – | – | – | – | – |
| Noise (LwA) Min Speed (dB) | 60 | 45 | 49 | 49 | 60 | 45 |
| Noise (LwA) Max Speed (dB) | – | – | – | – | – | – |
| Noise (LwA) Boost Speed (dB) | – | – | – | – | – | – |
| Off mode Power (Po) W | – | – | – | – | – | – |
| Standby Power (Ps) W | – | – | – | – | – | – |
| Energy Efficiency Index (EEI) | 97,7 | 91,0 | 107,7 | 107,7 | 97,7 | 91,0 |
| Time increase actor (f) | 1,7 | 1,7 | 1,8 | 1,8 | 1,7 | 1,7 |
| Air flow at best efficiency point (Qbep) m3 / h | 216 | 131,4 | 136 | 136 | 216 | 136 |
| Air pressure at best efficiency point(Pbep) Pa | 225 | 208 | 191 | 191 | 225 | 191 |
| Electric power input at best efficiency point (Wbep) W | 152 | 94,1 | 137 | 137 | 152 | 137 |
| Nominal power of the lighting system (WL) W | 12 | 12 | 56 | 56 | 12 | 12 |
| EXTERNAL DIMENSIONS | | | | | | |
| Width (mm) | 900 | 900 | – | – | 600 | 600 |
| Depth (mm) | 500 | 500 | – | – | 500 | 500 |
| Height (mm) | 150 | 150 | – | – | 150 | 150 |
| ELECTRICAL FEATURES | | | | | | |
| Motor power (W) | 180 | 105 | 130 | 130 | 180 | 105 |
| Total hood power (W) | 192 | 117 | 215 | 215 | 192 | 117 |
| TECHNICAL DATA | | | | | | |
| Anti Return Valve | √ | √ | √ | √ | √ | √ |
| Ø Outlet (mm) | 120 | 120 | 120 | 120 | 120 | 120 |
| Number of Filters | 3 | 3 | 2 | 3 | 2 | 2 |
| Charcoal filter | C1R | C2R | C2R | C2R | C1R | C2R |
| Recirculation kit | – | – | – | – | – | – |